

13 A plugs, socket-outlets, adaptors and connection units —

Part 4: Specification for 13 A fused connection units switched and unswitched

ICS 29.120.30

Committees responsible for this British Standard

The preparation of this British Standard was entrusted to Technical Committee PEL/23, Electrical accessories, upon which the following bodies were represented:

Association of Control Manufacturers [TACMA (BEAMA Ltd.)]
 Association of Manufacturers of Domestic Electrical Appliances
 ASTA Certification Services
 British Cable Makers Confederation
 British Electrical Systems Association (BEAMA Ltd.)
 British Electrotechnical Approvals Board
 British Radio and Electronic Equipment Manufacturers' Association
 BSI Testing Services
 Consumers' Association
 Consumer Policy Committee of BSI
 Copper Development Association
 Department of Trade and Industry (Consumer Safety Unit, CA Division)
 BEAMA Installation
 Electricity Association
 ERA Technology Ltd.
 Federation of the Electronics Industry
 Industry Council for Electronic Equipment Recycling
 Institute of Trading Standards Administration
 Institution of Electrical Engineers
 Institution of Incorporated Executive Engineers
 International Consumer Electronics Association (ICEA)
 Lighting Association
 Lighting Industry Federation Ltd.
 National Inspection Council for Electrical Installation Contracting
 National Standards Authority of Ireland
 Royal Society for the Prevention of Accidents

This British Standard, having been prepared under the direction of the Electrotechnical Sector Board, was published under the authority of the Standards Board and comes into effect on 15 November 1995

© The British Standards Institution 2012

The following BSI references relate to the work on this British Standard:

Committee reference PEL/23
 Drafts for comment
 92/33308 DC
 11/30203498 DC

Amendments issued since publication

Amd. No.	Date	Comments
9544	October 1997	
14537	9 October 2003	
17438	30 November 2007	See foreword
A4	31 May 2012	See foreword

Contents

	Page
Committees responsible	Inside front cover
Foreword	ii
<hr/>	
1 Scope	1
2 Conditions of use	1
3 Terms and definitions	1
4 General	4
5 General conditions for type testing	4
6 Classification	4
7 Marking and labelling	4
8 Clearances, creepage distances and solid insulation	6
9 Accessibility of live parts	8
10 Provision for earthing	9
11 Terminals	9
12 <i>Not used</i>	10
13 Construction of connection units	10
14 Resistance to ageing and humidity	12
15 Insulation resistance and electric strength	13
16 Temperature rise	14
17 Breaking capacity of connection units	16
18 Normal operation of connection units	16
19 Connection of flexible cords and cord anchorage	16
20 Mechanical strength	18
21 Screws, current-carrying parts and connections	19
22 Resistance to heat	19
23 Resistance to abnormal heat and fire	20
24 Resistance to excessive residual stresses and to rusting	21
25 <i>Not used</i>	21
<hr/>	
Annex A (normative) The construction and calibration of a calibrated link	22
Annex B (normative) Measurement of clearances and creepage distances	23
Annex C (normative) Determination of the Comparative Tracking Index (CTI) and Proof Tracking Index (PTI)	28
Annex D (normative) Relation between rated impulse withstand voltage, rated voltage and Overvoltage Category	28
Annex E (normative) Pollution degree	29
Annex F (normative) Impulse voltage test	29
Annex G (informative) Specific structure of BS EN 50525 and its derivation from British Standards and from HD 21 and HD 22	31
<hr/>	
Figure 19 — Solid link for test on fuse clips	32
Figure 21 — Pendulum impact test	33
Figure 24 — <i>Figure deleted</i>	35
Figure 28 — Calibrated link	36
Figure 29 — Calibration jig for calibrated link	37
<hr/>	
Table 1 — Schedule of tests	5
Table 2 — Torque values for screws and nuts	9
Table 3a — Permitted temperature rises	15
Table 3b — Actuator test force	12
Table 3c — Test voltage across the open contacts for verifying the suitability for isolation, referred to the rated voltage and to the altitude where the test is carried out	14
Table 4 — Cord grip tests related to size of flexible cable or cord	17
Table 5 — Application of glow-wire test	20
Table 6 — Minimum clearances for basic insulation	7
Table 7 — Minimum creepage distances for basic insulation	8
Table 8 — Withstand voltages for insulation types	8
Table B.1 — Minimum values of width X	23
Table D.1 — Rated impulse withstand voltage for connection units energized directly from the low voltage mains	28
Table F.1 — Test voltages for verifying clearances at sea level	30
<hr/>	
List of references	38

Foreword

This part of BS 1363 is published by BSI Standards Limited, under licence from The British Standards Institution. This part of BS 1363 has been prepared by Technical Committee PEL/23.

BS 1363-4:1995+A4:2012 supersedes BS 1363-4:1995 (incorporating Amendments Nos. 1:1997, 2:2003 and 3:2007), which, however, remains current and will be withdrawn on 31 May 2015.

The start and finish of text introduced or altered by Amendment No. 3 and Amendment No. 4, respectively is indicated in the text by tags $\boxed{A_3}$ $\triangleleft A_3$ and $\boxed{A_4}$ $\triangleleft A_4$ respectively. Text introduced or altered by Amendment No. 1 and Amendment No. 2 is not tagged. Minor editorial corrections are not tagged.

BS 1363 comprises four parts covering the following.

- *Part 1: Rewirable and non-rewirable 13 A fused plugs;*
- *Part 2: Switched and unswitched socket-outlets;*
- *Part 3: Adaptors;*
- *Part 4: 13 A fused connection units: switched and unswitched.*

NOTE In order to prevent confusion with BS 1363:1984, the figure and clause numbers have been retained.

BS 6500, which is called up in this part of BS 1363, has been superseded by BS EN 50525. In the transition period up until 31 December 2012 cords to either standard may be used. After that date all cords have to be to the relevant part of BS EN 50525.

The structure of BS EN 50525 and its derivation from British Standards and HD 21 and HD 22 is set out in BS EN 50525-1:2011, National Annex NA. This is reproduced in Annex G for the convenience of users of this part of BS 1363.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, pages i to ii, pages 1 to 38, an inside back cover and a back cover.

The BSI copyright notice displayed in this document indicates when the document was last issued.

1 Scope

This part of BS 1363 specifies requirements for 13 A fused fixed connection units for household, commercial and light industrial purposes, with particular reference to safety in normal use. The connection units are suitable for the connection of appliances, in a.c. circuits only, operating at voltages not exceeding 250 V r.m.s at 50 Hz.

Requirements are specified for connection units incorporating a fuse-link complying with BS 1362:1973.

Requirements are specified for 13 A connection units with or without associated controlling switches, for flush mounting in suitable enclosures, e.g. boxes complying with BS 4662:1970, or for surface or panel mounting. Connection units are intended for use with cables complying with BS 6004:2000 having copper conductors. A_4 Connection units with cord outlets are additionally intended for use with flexible cords, complying with BS 6500:2000, or equivalent cords to the relevant part of BS EN 50525 (see Annex G), on the load (output) side A_4 . Connection units containing devices other than fuse-links, switches and indicator lamps are outside the scope of this standard.

NOTE 1 The titles of the publications referred to in this standard are listed on the inside back cover.

NOTE 2 Requirements for electromagnetic compatibility are not given for the following reasons.

A connection unit does not emit intolerable electromagnetic interference since significant electromagnetic disturbances are only generated during insertion and withdrawal which are not continuous.

A connection unit is mechanical by nature of construction. The product is therefore immune from electromagnetic interference.

2 Conditions of use

Fused connection units shall be suitable for use under the following conditions:

- a) an ambient temperature in the range $-5\text{ }^{\circ}\text{C}$ to $+40\text{ }^{\circ}\text{C}$, the average value over 24 h not exceeding $25\text{ }^{\circ}\text{C}$;

NOTE Under normal conditions of use, the available cooling air is subject to natural atmospheric variations of temperature and hence the peak temperature occurs only occasionally during the hot season, and on those days when it does occur it does not persist for lengthy periods.

- b) a situation not subject to exposure to direct radiation from the sun or other source of heat likely to raise temperatures above the limits specified in a);
- c) an altitude not exceeding 2 000 m above sea level;
- d) an atmosphere not subject to abnormal pollution by smoke, chemical fumes, rain, spray, prolonged periods of high humidity or other abnormal conditions. This is equivalent to pollution degree 2, see Annex E, and overvoltage category III, see Annex D.

3 Terms and definitions

For the purposes of this British Standard the following definitions apply.

NOTE Where the terms voltage and current are used, they imply r.m.s values, unless otherwise stated.

3.1

fused connection unit

A_3 a device associated with the fixed wiring of an installation by which equipment may be connected, and having provision for a replaceable cartridge fuse-link A_3

3.2

cord outlet connection unit

a fixed wiring device as in 3.1 having provision for a flexible cable or cord

3.3

switched connection unit

a fused connection unit as in 3.1 or 3.2, with an associated switch to disconnect the supply to both line and neutral load terminals

3.4

surface-mounted connection unit

a fused connection unit as in 3.1, 3.2 or 3.3, which is intended to be mounted on a wall or other flat surface without the need for recessing

3.5

flush-mounted connection unit

a fused connection unit as in 3.1, 3.2 or 3.3, which is intended to be mounted in a box which is recessed into a wall or other flat surface. The fused connection unit plate and the base are regarded as forming a complete unit, and the connection unit plate is mounted with its back either flush with a wall or other flat-surfaced structure, or flush with the front of a box or enclosure

3.6

panel-mounted connection unit

a fused connection unit intended for incorporation into equipment panels or electrical trunking and which depends upon such incorporation for its enclosure

3.7

connection unit base

that part of the fused connection unit which carries live parts. It may be integral with the fused connection unit plate

3.8

connection unit plate

the external plate which covers the base and live parts of a fused connection unit

3.9

actuating member

that part which is moved, e.g. pulled, pushed or turned by the user, to operate the switch mechanism

3.10

indicator lamp (pilot lamp)

A3 a lamp or similar device which illuminates to indicate that the connection unit load terminals are energized **A3**

3.11

terminal

a means by which the user can make an electrical connection between the appropriate cable or flexible cord and the conducting parts of the connection unit without the use of special tools

3.12

screw-type terminal

a terminal in which the connection is made directly by means of screws or nuts of any kind or indirectly through an intermediate metal part such as a washer, clamping plate or anti spread device on which the screw or nut bears directly.

NOTE The following are examples of screw-type terminals.

- a) A pillar terminal is a terminal in which the conductor is inserted into a hole or cavity, where it is clamped under the shank of the screw or screws.
- b) A screw terminal is a terminal in which the conductor is clamped under the head of the screw.
- c) A stud terminal is a terminal in which the conductor is clamped under a nut.

3.13

fuse carrier

a movable or removable part designed to carry, retain, cover and/or remove the fuse-link

3.14

type test

a test or series of tests made on a type test sample, for the purpose of checking compliance to the design of a given product with the requirements of the relevant standard

3.15

type test sample

a sample consisting of one or more similar units or specimens submitted by the manufacturer or responsible vendor for the purpose of a type test

3.16**accessible external surface of a connection unit**

all surfaces of a fused connection unit which can be touched by test probe B of BS EN 61032:1998 when the connection unit is installed as in use

3.17**live parts**

current-carrying parts and those metal parts in contact with them during normal use

NOTE Metal parts of the earthing circuit are not considered to be current-carrying parts

3.18**fine wire thermocouple**

a thermocouple having wires not exceeding 0.3 mm in diameter

3.19**calibrated link**

a calibrated heat source for use in place of a fuse-link during temperature rise tests

3.20**creepage distance**

the shortest distance along the surface of the insulating material between two conductive parts

3.21**clearance**

shortest distance in air between two conductive parts

3.22**basic insulation**

insulation applied to live parts to provide basic protection against electric shock

NOTE Basic insulation does not necessarily include insulation used exclusively for functional purposes.

3.23**supplementary insulation**

independent insulation applied in addition to basic insulation, in order to provide protection against electric shock in the event of failure of basic insulation

3.24**reinforced insulation**

a single insulation system applied to live parts, which provides a degree of protection against electric shock equivalent to double insulation under the conditions specified in the relevant standard

3.25**functional insulation**

insulation between conductive parts which is necessary only for the proper functioning of the equipment

A₃ 3.26**isolation**

function intended to make dead for reasons of safety all or a discrete section of the electrical installation by separating the electrical installation or section from every source of electrical energy A₃

A₄ 3.27**insignificant mass**

insufficient combustible mass to constitute a fire hazard

NOTE Parts of insignificant mass are usually less than 2 g. A₄

A₄ 3.28**small parts**

parts where each surface lies completely within a circle of 15 mm diameter or where some of the surface lies outside the 15 mm diameter circle but in such a way that it is not possible to place a circle of 8 mm diameter on any of this remaining surface

[BS EN 60695-2-11:2001, 3.1, modified]

NOTE More information concerning small parts can be found in BS EN 60695-2-11:2001, 3.1. A₄

4 General

Connection units shall be so designed and constructed that in normal use their performance is reliable and minimizes the risk of danger to the user or to the surroundings. Such connection units shall be capable of meeting all the relevant requirements and tests specified in this part of BS 1363.

A4 Throughout this standard, where cords to BS 6500 are referred to these may be replaced by equivalent cords (now referred to as cables) to BS EN 50525 which has superseded BS 6500; when BS 6500 is withdrawn, equivalent cables (cords) to BS EN 50525 shall be used. **A4**

5 General conditions for type testing

5.1 All tests shall be type tests.

Unless otherwise specified in this part of BS 1363, connection units shall be tested as delivered by the manufacturer or responsible vendor and under normal conditions of use, at an ambient temperature of $20\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$, after being conditioned at normal laboratory temperature and humidity levels for at least 4 days.

Unless otherwise stated by the manufacturer, flush-mounted connection units shall be tested when mounted on a corresponding insulated box complying with BS 4662:1970, the fixing screws being tightened with a torque of $0.6\text{ N}\cdot\text{m} \pm 5\%$. Other types are mounted according to the manufacturer's instructions.

Connection units used for the tests shall be representative of normal production items in respect of all details which may affect the test results.

Connection units shall be deemed to comply with this part of BS 1363 if no specimen fails in the complete series of tests given in Table 1.

If one specimen fails in the complete series of tests given in Table 1, then connection units of that type shall be deemed to have failed to comply with this part of BS 1363, unless the connection units can be shown to be not representative of normal production or design, in which case a further type test sample shall be submitted to the test or tests in that particular group. If there is no failure in this re-test then connection units of that type shall be deemed to comply with this Part of BS 1363.

If more than one specimen fails in the complete series of tests given in Table 1 then connection units of that type shall be deemed not to comply with this part of BS 1363.

For type testing, all tests have been included in the test schedule and shall be performed in the specified order.

NOTE 1 References to carrying out specific tests in various clauses are not intended to indicate a sequence of testing different to that in the schedule and should not be conducted as separate additional tests.

NOTE 2 Where reference to BS 6500:2000 is made equivalent flexible cords to the latest version of the standard may be used.

5.2 All inspections and tests, of any one classification (see Clause 6), shall be carried out as specified in the clauses listed in Table 1 on the number of specimens in the sample column and in the order given.

6 Classification

6.1 Fused connection units shall be classified as follows:

- switched or unswitched;
- flush or surface or panel-mounting;
- with or without provision for outgoing flexible cable or cord;
- with or without indicator lamp.

7 Marking and labelling

7.1 Connection units shall be legibly and durably marked with the following information, which shall not be placed on screws, removable washers or other easily removable parts, or upon parts intended for separate sale:

- a) either the name or trademark of the manufacturer or responsible vendor, which may be duplicated on a removable fuse carrier;
- b) the number of this British Standard, i.e. BS 1363¹⁾;

¹⁾ Marking BS 1363 on or in relation to a product represents a manufacturer's declaration of conformity, i.e. a claim by or on behalf of the manufacturer that the product meets the requirements of the standard. The accuracy of the claim is solely the claimant's responsibility. **A3** Text deleted **A3**

- c) terminals intended for the connection of the various conductors shall be identified by the symbols given in 7.2;
- d) the words “FUSE” or “FUSED” or the symbol (given in 7.2) on the external accessible surface of a connection unit or fuse carrier;
- e) all connection units shall be marked with:
- 1) rated current;
 - 2) rated voltage;
 - 3) nature of supply;
 - 4) incoming (in or supply) terminals;
 - 5) outgoing (out or load) terminals.

7.1.1 Compliance shall be checked by inspection and by rubbing the markings for approximately 15 s with a cloth soaked in water, and again for approximately 15 s with a cloth soaked in an aliphatic solvent hexane with a content of aromatics of maximum 0.1% by volume, a kauri-butanol value of 29, initial boiling point approximately 69 °C and a relative density of approximately 0.68. The marking shall remain legible. Markings produced by an engraving or moulding process shall be deemed to comply without test.

7.2 If symbols are used they shall be as follows:

amperes	A
volts	V
*alternating current	~
line	L
neutral	N
*earth	⊕ (preferred) or ⊥
*fuse	⊞

NOTE BS 6217 gives details of symbols marked*.

Table 1 — Schedule of tests

Sequence	Sample	Test	Clause number
1	3	Inspection, measurement, and manipulation.	5, 6, 7, 9, 11.1, 13 (13.1, 13.2, 13.3 ^{A4} 13.4 and 13.8 ^{A4} 19 (19.2, 19.3 and 19.4 only), 21, 8 ^{A4} (except Annex C) ^{A4}
2	3	General	5, 10, 19.1, 14.2, 13.5 (9.1.1 only), 20.1.3.
3	3		5, 14.1, 15, 13.5 (20.1.2 and 17.1.3 only), 17.1.2, 13.6, 16, 21.3
4	3		5, 14.1, 15, 18,
5	3	Materials	5, 22
6	3		5, 23.2 ^{A4} , 8.2 (Annex C only) ^{A4}
7	3		5, 24, 21.3
8 ^a	3	Positive break	5, ^{A3} 13.7 ^{A3}
^{A3} 9	3	Isolation	5, 15.2 ^{A3}

NOTE The order of tests given in sequence no. 1 above is preferred but not mandatory except where required within the text of the appropriate clause.

^a An additional new set of three samples prepared with the contacts closed is supplied by the manufacturer for this test

For the marking of the rated current and rated voltage of the connection unit figures may be used alone, the figures for the current rating being placed before or above that of the rated voltage and separated by a line. If a symbol for nature of supply is used, it shall be placed next to the marking for rated current and rated voltage. Examples are as follows:

13 A 250 V ~ or 13/250 ~ or $\frac{13}{250}$ ~

or 13 A 250 V a.c. or 13/250 a.c. or

$\frac{13}{250}$ a.c.

8 Clearances, creepage distances and solid insulation

Connection units shall be constructed so that the clearances, creepage distances and solid insulation are adequate to withstand the electrical stresses taking into account the environmental influences that may occur. ^{A3} Clearances, creepage distances and solid insulation shall conform to the relevant subclauses of 8.1, 8.2 and 8.3. The distance between lead wires in the pinch of a neon lamp with external resistor shall be a minimum of 1 mm.

^{A4} Text deleted ^{A4}

^{A4} Connection units complying with the requirements for basic insulation shall be deemed to meet the requirements of this clause. ^{A4} If the manufacturer declares an insulation level exceeding basic insulation then the connection unit shall be tested accordingly.

NOTE 1 The requirements and tests are based on BS EN 60664-1.

NOTE 2 Product insulation consists of Basic Insulation and Protective Earthing as required by BS EN 61140 for Class I equipment. Mechanical strength equivalent to that which would be provided by Reinforced Insulation as listed in BS EN 61140 is achieved in BS 1363 products through the specific mechanical and material tests of BS 1363. ^{A3}

8.1 Clearances

Connection units energized directly from the low-voltage supply fall into Overvoltage Category III.

The clearances shall be dimensioned to withstand the rated impulse voltage declared by the manufacturer considering the rated voltage and the Overvoltage Category as given in Annex D and the pollution degree declared by the manufacturer in accordance with Annex E.

For the measurements:

- all parts which may be removed without the use of a tool are removed and moveable parts which can be assembled in different orientations are placed in the most unfavourable position.

NOTE Moveable parts are, for example hexagonal nuts, the position of which cannot be controlled throughout an assembly.

^{A3} Text deleted ^{A3}

8.1.1 Clearances for basic insulation

The clearances for basic insulation shall not be less than the values given in Table 6 except as described below.

Smaller ^{A3} unspecified ^{A3} clearances (except those values marked in Table 6 with Note b) may be used if the connection unit meets the impulse withstand voltage test of Annex F at the impulse voltage specified in Annex D but only if the parts are rigid or located by mouldings or if the construction is such that it is unlikely that distances will be reduced by distortion or by movement of the parts during mounting, connection and normal use.

Compliance shall be checked by inspection, and if necessary by measurement, or by the test of Annex F

^{A3} If clearance distances are to be measured, this shall be carried out in accordance with Annex B. ^{A3}

8.1.2 Clearances for functional insulation

The clearances for functional insulation shall not be less than the values specified for basic insulation in 8.1.1.

Compliance shall be checked by inspection, and if necessary by measurement, or by the test of Annex F.

^{A3} If clearance distances are to be measured, this shall be carried out in accordance with Annex B. ^{A3}

8.1.3 Clearances for supplementary insulation

The clearances for supplementary insulation shall not be less than the values specified for basic insulation in 8.1.1.

Compliance shall be checked by inspection, and if necessary by measurement, or by the test of Annex F.

^{A3} If clearance distances are to be measured, this shall be carried out in accordance with Annex B. ^{A3}

Table 6 — Minimum clearances for basic insulation

Rated impulse withstand voltage KV ^a	Minimum clearances in air up to 2 000 m above sea level mm
0.33	0.2 ^b
0.50	0.2 ^b
0.80	0.2 ^b
1.5	0.5
2.5	1.5
4.0	3
6.0	5.5

^a See Annex D. This voltage is:

- for functional insulation: the minimum impulse voltage expected to occur across the clearance;
- for basic insulation directly exposed to or significantly influenced by transient overvoltage from the low-voltage mains: the rated impulse withstand voltage of the connection unit;
- for other basic insulation: the highest impulse voltage that can occur in the circuit.

^b Minimum clearance values are based on BS EN 60664-1.

8.1.4 Clearances for reinforced insulation

The clearances for reinforced insulation shall be not less than the values specified for basic insulation in 8.1.1 but using the next higher step for rated impulse withstand voltage given in Table 6.

Compliance shall be checked by inspection and by measurement A_3 , or by the test of Annex F A_3 .

A_3 8.1.5 Contact gap

The minimum contact gap shall be 3 mm in the open position.

Compliance shall be checked by measurement. A_3

8.2 Creepage distances

The creepage distances shall be dimensioned for the voltage, which is expected to occur in normal use taking into account the pollution degree, and the material group as declared by the manufacturer.

For the measurements:

- all parts which may be removed without the use of a tool are removed and moveable parts which can be assembled in different orientations are placed in the most unfavourable position.

NOTE 1 Moveable parts are, for example hexagonal nuts, the position of which cannot be controlled throughout an assembly.

NOTE 2 A creepage distance cannot be less than the associated clearance.

Creepage distances are measured in accordance with Annex B.

The relationship between material group and between comparative tracking index (CTI) values and proof tracking index (PTI) values is as follows:

Material group I	$600 \leq \text{CTI/PTI}$
Material group II	$400 \leq \text{CTI/PTI} < 600$
Material group IIIa	$175 \leq \text{CTI/PTI} < 400$
Material group IIIb	$100 \leq \text{CTI/PTI} < 175$

The CTI or PTI values are determined in accordance with Annex C.

NOTE 3 For glass, ceramics and other inorganic materials which do not track, creepage distances need not be greater than their associated clearance.

8.2.1 Creepage distances for basic insulation

The creepage distances for basic insulation shall not be less than the values given in Table 7.

Compliance shall be checked by measurement.

Table 7 — Minimum creepage distances for basic insulation

Rated voltage ^a V (r.m.s.)	Pollution Degree 2 ^b			Pollution Degree 3 ^b		
	Material group			Material group		
up to and including	I	II	IIIa/IIIb	I	II	IIIa
250	1.3	1.8	2.5	3.2	3.6	4.0

^a This voltage is the voltage rationalized through Table 3a and Table 3b of BS EN 60664-1 based on the rated voltage.
^b Details of pollution degrees are given in Annex E.

8.2.2 Creepage distances for functional insulation

The creepage distances for functional insulation shall not be less than the values specified for basic insulation in 8.2.1.

Compliance shall be checked by measurement.

8.2.3 Creepage distances for supplementary insulation

The creepage distances for supplementary insulation shall not be less than the values specified for basic insulation in 8.2.1.

Compliance shall be checked by measurement.

8.2.4 Creepage distances for reinforced insulation

The creepage distances for reinforced insulation shall not be less than those derived from twice the distance specified for basic insulation in Table 7.

Compliance shall be checked by measurement.

8.3 Solid insulation

Solid insulation for basic, A_4 functional, A_4 supplementary and reinforced insulation shall be capable of withstanding electrical stresses which may occur in normal use.

No minimum thickness is specified for solid insulation.

A_4 8.3.1 Compliance shall be checked by tests in accordance with 15.1.3 using the values given in Table 8. A_4

A_4 Text deleted A_4

A_3 Table 8 — Withstand voltages for insulation types

Insulation	Test V (r.m.s)
Functional Insulation	1 500
Basic Insulation	1 500
Supplementary Insulation	1 500
Reinforced Insulation	3 000

A_3

9 Accessibility of live parts

9.1 Connection units shall be so designed and constructed that when they are mounted and wired as in normal use, live parts are not accessible even after removal of parts which can be removed without the use of a tool.

9.1.1 Compliance shall be checked by the application of test probe B of BS EN 60132:1998 to the accessible external surface of the connection unit applied with a force of 5_{-1}^0 N in the most unfavourable position. It shall not be possible to touch live parts.

10 Provision for earthing

10.1 All accessible metal parts of connection units shall be in electrical contact with the earthing terminal(s) except that metal parts on, or screws in or through, non-conducting material, and separated by such material from current-carrying parts in such a way that in normal use they cannot become live, need not be in effective electrical contact with the earthing terminal(s) of the connection unit.

NOTE Metal parts having an accessible surface coating of lacquer or enamel are accessible metal parts within the meaning of this requirement.

10.1.1 Compliance shall be checked by inspection and the following:

- a) for metal parts insulated from live parts, by the test described in **15.1.3**;
- b) for metal parts connected to an earthing terminal by the following test. A current of 25 ± 0.75 A, derived from an a.c. source having a no-load voltage not exceeding 12 V, shall be passed for 60^{+5}_0 s between the earthing terminal and any accessible metal part intended to be earthed.

The resistance between the earthing terminal and any other nominated part shall not exceed 0.05 Ω .

10.2 If means are provided for electrically bonding the mounting box to the earthing circuit of the connection unit, by means of the fixing screws, the connection between the screw and earthing terminal shall be of low resistance.

10.2.1 Compliance shall be checked by the test described in **10.1.1b**) applied between the connection unit earthing terminal(s) and any fixing screw in electrical contact with the earthing circuit. For the purpose of this test the connection unit shall be attached to its appropriate mounting box, the fixing screws being tightened to a value of two-thirds those given in Table 2.

Table 2 — Torque values for screws and nuts

Declared diameter of screw thread mm	Torque (see Note 1)		
	For metal screws as described below (see Note 2) N·m	For other metal screws and nuts N·m	For screws of insulating material N·m
Up to and including 2.8	0.2	0.4	0.4
Over 2.8, up to and including 3	0.25	0.5	0.5
Over 3, up to and including 3.2	0.3	0.6	0.6
Over 3.2, up to and including 3.6	0.4	0.8	0.6
Over 3.6, up to and including 4.1	0.7	1.2	0.6
Over 4.1, up to and including 4.7	0.8	1.8	0.9
Over 4.7, up to and including 5.3	0.8	2.0	1.0
Over 5.3, up to and including 6	—	2.5	1.25

NOTE 1 The recording of a measured value given in this table is considered to comply with this part of BS 1363 on condition that the uncertainty of measurement at not less than 95 % confidence level does not exceed $\pm 10\%$.

NOTE 2 This column applies to metal screws without heads if the screw when tightened does not protrude from the hole, and to other metal screws which cannot be tightened by means of a screwdriver with a blade wider than the diameter of the screw.

11 Terminals

11.1 Terminals shall provide for effective clamping and securing of conductors connected to them, so that efficient electrical connection is made.

11.1.1 Compliance shall be checked in accordance with **11.2** to **11.8**.

11.2 Connection units shall be provided with line, neutral and earth terminals as defined in **3.12**.

A4 Separate terminals shall be provided for incoming (supply) and outgoing (load) connections. **A4**

11.2.1 Compliance shall be checked by inspection.

11.3 Incoming (or supply) line and neutral terminals shall permit the connection, without special preparation, of one, two or three 2.5 mm² solid or stranded, or of one or two 4 mm² stranded conductors A_3 as given in Table 8 of BS 6004:2000 A_3 .

11.3.1 Compliance shall be checked by inspection and by fitting the appropriate conductors.

11.4 Incoming earthing terminals shall permit the connection, without special preparation, of one, two or three 1.5 mm² or 2.5 mm² solid or stranded, or of one or two 4 mm² stranded conductors A_3 as given in Table 27 of BS 6500:2000 A_3 .

11.4.1 Compliance shall be checked by inspection and fitting the appropriate conductors.

11.5 Outgoing (or load) line, neutral and earth terminals shall permit the connection without special preparation of one conductor of solid or stranded cables of 1.5 mm² or 2.5 mm² or one conductor of a flexible cord having a nominal cross-sectional area of 0.5 mm² up to and including 1.5 mm² where provision is made by the connection unit for the fitting of such a cable or cord.

11.5.1 Compliance shall be checked by inspection and by fitting the appropriate conductors.

11.6 Where pillar terminals are used they shall have clamping screws of sufficient length to extend to the far side of the conductor hole. The end of the screw shall be slightly rounded so as to minimize damage to the conductors. The sizes of the conductor hole and the clamping screw shall be such that the clearance between each side of the major diameter of the clamping screw and the conductor hole does not exceed 0.4 mm when intended for the connection of flexible cords and 0.6 mm when intended solely for the connection of fixed wiring.

11.6.1 Compliance shall be checked by inspection and measurement.

11.7 Terminal screws shall have a declared outside diameter of not less than 3 mm or be not smaller than 6 BA.

Thread cutting and/or thread forming screws shall not be used.

11.7.1 Compliance shall be checked by inspection and measurement.

11.8 Outgoing (or load) terminals of cord outlet connection units shall be so located or shielded that should a stray strand of a flexible conductor escape when the conductors are fitted, there is negligible risk of accidental connection between live parts and accessible external surfaces, or of a stray strand bypassing the fuse-link.

11.8.1 Compliance shall be checked by inspection, and by the following test.

A 6 mm length of insulation is removed from the end of a flexible conductor having a nominal cross-sectional area of 1.5 mm². One strand of the flexible conductor is left free and the other strands are fully inserted and clamped in the terminal. The free strand is bent, without tearing the insulation back, in every possible direction, but without making sharp bends round barriers.

The free strand of a conductor connected to a live terminal shall not:

- a) touch any metal part, so as to bypass any fuse-link;
- b) touch any metal part which is accessible or is connected to an accessible metal part;
- c) reduce creepage distances and clearances to accessible surfaces to less than 1.3 mm.

The free strand of a conductor connected to an earthing terminal shall not touch any live parts.

12 (Not used)

13 Construction of connection units

13.1 Surface-mounted connection units shall be provided with means to ensure proper seating on a flat surface and with fixing holes which will accept No. 6 wood screws complying with BS 1210:1963.

Flush or semi-flush mounted socket-outlet plates shall have provision for two M3.5 fixing screws at centres of 60.3 ± 0.2 mm on the horizontal or vertical centrelines for boxes intended to accommodate 1-gang socket-outlets, 120.6 mm ± 0.3 mm on the horizontal or vertical centrelines for boxes intended to accommodate 2-gang socket-outlets or 180.9 mm ± 0.4 mm on the horizontal or vertical centrelines for boxes intended to accommodate 3-gang socket-outlets in accordance with BS 4662.

The size and disposition of fixing holes shall be such as to allow satisfactory attachment to boxes having centres manufactured to a ± 0.8 mm tolerance.

13.1.1 Compliance shall be checked by inspection and measurement.

13.2 Flush mounted connection unit plates for use with boxes complying with BS 4662:1970, either of insulating material or metal, or a combination of both, shall be 82.5 mm \times 82.5 mm minimum.

13.2.1 Compliance shall be checked by inspection and measurement.

13.3 For flush mounted connection units, the size of the base shall be such that the clearance for the purpose of wiring between the base or bases and the inside walls of the box or enclosure is not less than 6 mm and such that the clearance between the overall depth of the base or bases and the bottom of the 35.0 mm deep box or enclosure is not less than 14 mm, when the box and the connection units are in the relative positions they will occupy in use, except that encroachments on these clearances shall be permissible provided that there is no interference with at least one conduit or cable entry on each face of the box or enclosure.

There shall be no live metal protruding from or flush with the connection unit base. Any exposed live metal part shall be recessed to give the necessary clearance distance from any earthed metal which may come into contact with the base.

NOTE If the terminals are arranged for front wiring after fixing the base then the 14 mm clearance need not apply.

For connection units for use in other boxes or enclosures, the clearance between the connection unit and the appropriate box or enclosure shall provide adequate wiring space according to the method of entry of all the necessary cables.

Where it is intended that the fixed supply wiring conductors pass through holes in the base of the connection unit to the terminals, each hole shall be large enough to accept satisfactorily three 2.5 mm² cable cores with their insulation, the sheath, if any, having been removed.

13.3.1 Compliance shall be checked by inspection and measurement.

13.4 Conductive component parts of connection units shall be so located and separated that, in normal use, they cannot be displaced so as to affect adversely the safety or proper operation of the connection units.

13.4.1 Compliance shall be checked by inspection and manipulation.

13.5 Provision shall be made for a fuse-link complying with BS 1362:1973 and it shall be mounted in suitable contacts between the supply line terminal and the corresponding load terminal.

When a switch is incorporated the fuse link shall be mounted in suitable contacts between the outgoing contact of the line pole of the switch and the corresponding load terminal.

The design shall be such that the fuse-link cannot be displaced accidentally during use or be left in incorrect contact when the fuse cover or fuse carrier is replaced in its correct position.

It shall be possible to remove and replace the fuse-link whilst passing current without dismantling the connection unit and no parts which are live shall become accessible during its removal or replacement.

The connections of a fuse link contact directly to another conductive part (excluding the line terminal) shall be formed in one piece or connected in such a way that an efficient electrical connection is made that can not work loose in normal use. These connections shall not be made by means of a screw.

13.5.1 Compliance shall be checked by inspection and by the application of test probe B and test probe 13 of BS EN 61032:1998 applied with a maximum force of 5 N, applied in accordance with **9.1.1**.

Fuse-link clips in connection units shall be checked for mechanical strength by the insertion and withdrawal test described in **20.1.2**.

Current making and breaking of fuse-links shall be checked by the test described in **17.1.3** after which the temperature-rise test described in Clause **16** shall be carried out.

13.6 The actuating mechanism shall be so constructed that when operated, the switch can remain only in a position giving adequate contact or adequate separation of the contacts.

Switches shall be so constructed that undue arcing cannot occur when the switch is operated slowly.

13.6.1 Compliance shall be checked by inspection and by the following test:

Following the test described in **17.1.2**, the circuit is broken a further 10 times, each time moving the actuating member by hand over a period of approximately 2 s, in a manner such as to attempt to stop the moving contact in an intermediate position, causing arcing. The actuating member shall be released after approximately 2 s and any arcing shall cease.

13.7 The actuating member of a switch shall not remain at rest in the off position whilst the switch contacts remain closed.

The actuating mechanism shall be so constructed that when operated the switch can remain only in a position giving adequate contact or adequate separation of contacts.

For connection units that cannot be dismantled after assembly an additional new set of three samples prepared with the contacts closed is supplied by the manufacturer for this test.

13.7.1 Compliance shall be checked by inspection and by the test of **13.7.2**.

13.7.2 The necessary force F to switch off shall first be measured and the force should be applied to the extremity of the actuating member.

A3 With the actuating member of the switch in the closed position, the fixed and moving contacts of each pole shall be mechanically fixed together to provide the most onerous condition. When fixing the contacts, care shall be taken to ensure that the test result is not unduly affected. **A3**

The actuating member shall be subjected to a test force as defined in Table 3b. This force shall be applied in one smooth and continuous motion to the extreme point of the actuating member in the most favourable direction to open the contacts for a period of 10 s.

If locking means are designed to lock the actuating members in opened position, it shall not be possible to lock the actuating members in this position while the force is applied.

After the test and when the test force is no longer applied, the actuating member shall not remain at rest in the "OFF" position.

Table 3b — Actuator test force

Type of actuator	Test force	Minimum test force N	Maximum test force N
Switch actuator	3F	50	150
F is the normal operating force in new condition. The test force shall be 3F with the stated minimum and maximum values applied.			

NOTE 1 The use of grease and the likes are not considered to be a mechanical means.

NOTE 2 The specimen may be dismantled where necessary in preparation for this test but adequate care must be taken that the test specimen or components are not damaged during this preparation.

A3 **13.8** For connection units incorporating an indicator lamp, the connection of the indicator lamp shall only be made across the line and neutral load terminals. No other connection arrangements shall be permitted.

13.8.1 Compliance shall be checked by inspection. **A3**

14 Resistance to ageing and humidity

14.1 Resistance to ageing

Connection units shall be resistant to ageing.

14.1.1 Compliance shall be checked by the following test:

Connection units are subjected to a test in a heating cabinet with an atmosphere having the composition and pressure of the ambient air and ventilated by natural circulation.

The temperature in the cabinet is kept at $70\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$.

The specimens are kept in the cabinet for 168 h (0, +2) h.

NOTE 1 The use of an electrically heated cabinet is recommended.

NOTE 2 Natural circulation may be provided by holes in the walls of the cabinet.

After the treatment, the samples are removed from the cabinet and kept at room temperature and relative humidity for 1 h; and following which they are examined and shall show no damage which:

- would lead to non-compliance with this standard;
- would impair safety;
- would prevent further use.

14.2 Resistance to humidity

Connection units shall be proof against humid conditions which may occur in normal use.

14.2.1 Compliance shall be checked by the humidity treatment described below followed within 20 min by the measurement of the insulation resistance and by the electric strength test specified in Clause 15.

Vitrified ceramic material, which after 24 h immersion in water has not increased in mass by more than 0.5 % after all the moisture has been removed from its surface, shall not be subjected to further tests, providing the resistance to water of the material does not depend on glaze or varnish.

To suit the ambient conditions at the time of test, a convenient temperature, T (in °C), between 20 °C and 30 °C, is chosen as a reference temperature. The specimen is brought to a temperature of between T °C and $(T + 4)$ °C and then placed in a humidity cabinet containing air with a relative humidity maintained between 85 % and 95 %. The temperature of the air where the specimens are placed shall be kept within ± 2 °C of the chosen value T .

The specimen is kept in the cabinet for 48^{+1}_0 h.

NOTE 1 In most cases samples may be brought to the chosen reference temperature by keeping them at this temperature for at least 4 h before the humidity treatment.

NOTE 2 A relative humidity of between 85 % and 95 % can be obtained by placing in the humidity cabinet a saturated solution of potassium nitrate (KNO_3) or sodium sulfate (Na_2SO_4) in water having a sufficiently large contact surface with the air.

In order to achieve the specified conditions within the cabinet, it is necessary to ensure constant circulation of the air within the cabinet and, in general, to use a cabinet which is thermally insulated.

The tests described in Clause 15 shall be made in the humidity cabinet or immediately after removal of the specimen from the cabinet in a room where the specified temperature is maintained. Inspection shall not reveal any damage to the sample which would impair its use or safety within the requirements of this part of BS 1363.

15 Insulation resistance and electric strength

15.1 The insulation resistance and electric strength of connection units shall be adequate.

15.1.1 Compliance shall be checked by the tests given in 15.1.2 and 15.1.3.

15.1.2 The insulation resistance is measured using a d.c. voltage of 500^{+250}_0 V, the measurement being made for 60^{+5}_0 s after application of the voltage. The insulation resistance is measured consecutively between the following:

- a) line and neutral terminals;
- b) line and neutral terminals connected together and:
 - 1) a metal foil in contact with the entire accessible external surface;
 - 2) the earthing terminal;
 - 3) any metal part of a cord anchorage;
- c) each switched pole terminal of a switched connection unit and corresponding load terminal with the switch contacts open, with the fuse-link in place.

The insulation resistance shall be not less than the following:

- i) 5 M Ω between parts of opposite polarity;
- ii) $\square 4$ 5 M Ω between parts of opposite polarity connected together, and other parts, including earthed metal, intended to be insulated from them; $\square 4$
- iii) 2 M Ω across switch contacts with the switch open (where applicable).

One pole of neon indicators and the like shall be disconnected before making this test.

15.1.3 A 50 Hz voltage of substantially sinusoidal waveform is applied as described in **15.1.2**. Initially, not more than 1 000 V is applied, the voltage then being raised to 2 000 V \pm 60 V. The high voltage source used shall be such that when the output is adjusted to 2 000 V \pm 60 V for 60⁺⁵₀ s and is then short circuited, the output current is not less than 200 mA. Any overcurrent protection shall not operate at a current less than 100 mA.

During the test no flashover or breakdown shall occur.

Glow discharges without drop in voltage shall be ignored.

One pole of neon indicators and the like shall be disconnected before making this test.

A3 **15.2** Switched connection units shall be suitable for isolation.

Switched connection units are classified as Overvoltage Category III.

They shall be tested in the new, clean and dry conditions, when in the open position, across the terminals of each pole.

Compliance is checked by the following test:

The 1.2/50 μ s impulse voltage according to **A4** BS EN 61180-1:1995, Figure 1 **A4** is applied between the line terminals connected together and the load terminals connected together with the contacts in the open position.

The impulses are given by a generator producing positive and negative impulses having a front time of 1.2 μ s and a time to half value of 50 μ s, the tolerances being:

- \pm 5% for the peak value;
- \pm 30% for the front time;
- \pm 20% for the time to half value.

The shape of the impulses is adjusted with the connection unit under test connected to the impulse generator. For this purpose appropriate voltage dividers and voltage sensors shall be used.

Small oscillations in the impulses are allowed, provided that their amplitude near the peak of the impulse is less than 5% of the peak value.

For oscillations on the first half of the front, amplitudes up to 10% of the peak value are allowed.

The test voltage shall be chosen from Table 3c, in accordance with the rated voltage.

The impulse voltage shall be applied 3 times at intervals of 1 s minimum.

There shall be no discharges during the test.

NOTE 1 The surge impedance of the test apparatus should be 500 ohm.

NOTE 2 The expression "discharge" is used to cover the phenomena associated with the failure of insulation under electric stress, which includes current flow and a drop in voltage.

Table 3c — Test voltage across the open contacts for verifying the suitability for isolation, referred to the rated voltage and to the altitude where the test is carried out

Rated Voltage (V)	Test voltage (kV) and corresponding altitudes above sea level (m)				
	Sea level	200	500	1 000	2 000
exceeding 130	6.2	6	5.8	5.6	5

A3

16 Temperature rise

16.1 Connection units and their surroundings shall not attain excessive temperatures in normal use.

16.1.1 Compliance shall be checked by the following test.

The test shall be carried out at the rated voltage $^{+10}_{-20}$ %.

For the test, where conductors are connected to terminals, the terminal screws shall be tightened with a torque equal to two-thirds of the values given in Table 2.

During the test temperature rises are measured at the terminals and where overheating might result in a hazard. Values measured shall not exceed the appropriate values given in Table 3a. Temperature rises are determined by means of fine wire thermocouples, so chosen and positioned that they have minimum effect on the temperature of the part under test. The thermocouples are attached by means of a mixture of equal parts of resin adhesive and zinc oxide, by soldering, or by other equally effective means.

NOTE If soldering is used, it is essential that care is taken to ensure that the heat from the soldering process does not affect the performance of the connection unit and that no electrical connections are bridged by solder.

Table 3a — Permitted temperature rises

Measurement point	Temperature rise K
Terminals	52
Accessible external surface	52
NOTE The recording of a measured value up to and including the specified maximum permissible limit for temperature rise is considered to comply with the requirements of the standard on condition that the uncertainty of measurement at not less than 95 % confidence level does not exceed ± 2 °C.	

Surface-mounted connection units are mounted as in use, with their accompanying mounting block or backplate fixed to a vertical plywood board, having a nominal thickness of 24 mm and having a surface extending at least 150 mm in each direction beyond the extremity of the connection unit.

Flush-mounted connection units designed for use with flush-mounted boxes as shown in Figure 1b of BS 4662:1970 are mounted on a test fixture designed to simulate normal conditions of use, comprising such a metal box having a nominal internal depth of 35 mm, which is fixed into a block of wood, so that the front edges of the metal box are between 2.5 mm to 5 mm below the front surface of the block. The size of the block shall be such that there is a minimum of 25 mm of wood surrounding the box on all four sides and the back. The connection unit is then mounted by means of its fixing screws, so that the rear of the plate is flush with the surface of the block.

The incoming (supply) line, neutral and earth terminals of a connection unit are connected to an incoming and outgoing 2.5 mm² 2-core and earth PVC insulated and sheathed cable as given in Table 8 of BS 6004:2000.

The incoming (supply) cable shall enter on the horizontal axis on one side of the enclosure and the outgoing (supply) cable shall leave on the horizontal axis on the opposite side of the enclosure. Where possible, the cables shall enter and leave the enclosure through the standard knockouts provided and these, if required, shall be fitted with suitable grommets. The points of entry and exit shall be sealed to prevent circulation of air.

The connection unit shall be wired with the incoming and outgoing (supply) cables as described above and with a 1.5 mm² 3-core flexible cord **A3** as given in Table 27 of BS 6500:2000 **A3** for the load (outgoing) which shall leave at the position dictated by the design or, where there is a choice, at the bottom of the enclosure. Connection units fitted with cord grips are wired as intended in normal use with the cord grip device operative.

For surface-mounted connection units the length of each of the cables within its enclosure shall be 75 mm \pm 5 mm and for flush connection units the length of each cable within the box shall be 150 mm \pm 5 mm. In each case the outer sheath shall be removed from the cores to within 20 mm of the point of entry of the cable to the box or enclosure.

Cables outside the box or enclosure shall each have a minimum length of 1 m.

The fuse-link, incorporated in the connection units is replaced by a calibrated link which shall be constructed and calibrated in accordance with Annex A.

Electrical loads shall be connected to the connection unit as follows:

- total load on supply cables: 20 A nominal;
- connected load on outgoing terminals: 14 A \pm 0.4 A;
- balance of load on supply terminals: 6 A \pm 0.4 A.

NOTE The tolerance values for current take account of an uncertainty of measurement of not greater than ± 1.5 % at a confidence level of not less than 95 %.

The connection unit is subjected to the loading given for a minimum continuous period of 4 h or longer until stability is reached with a maximum duration of 8 h, stability being taken as less than 1 K rise within 1 h.

17 Breaking capacity of connection units

17.1 The breaking capacity of connection unit switches, and fuse contacts shall be adequate.

17.1.1 Compliance shall be checked by the tests described in 17.1.2 and 17.1.3 as applicable, which are completed with the connection units connected and mounted as in normal use.

17.1.2 The switch shall make and break a current of 1.25 times rated current ± 0.4 A [i.e. (1.25×13) A ± 0.4 A] in a substantially non-inductive a.c. circuit at $275 \text{ V} \pm 5 \text{ V}$, 10 times in succession at intervals of approximately 30 s.

After the test, the connection unit shall be capable of satisfying the subsequent tests detailed in Table 1 for the appropriate test sample.

17.1.3 The fuse contacts shall make and break a current by insertion and removal of a fuse in a substantially non-inductive a.c. circuit at $275 \pm 5 \text{ V}$, 10 times in succession at intervals of approximately 30 s, the values of the current being 1.25 times rated current ± 0.4 A [i.e. (1.25×13) A ± 0.4 A]. Standard 13 A fuse-links, complying with BS 1362:1973, shall be used for this test and, where necessary, shall be replaced during the test. For the test, all metal parts not in contact with line contacts shall be connected to the earth pole of the test circuit.

After the test, the connection units shall be capable of satisfying the subsequent tests detailed in Table 1 for the appropriate test sample.

18 Normal operation of connection units

18.1 Switched connection units shall withstand without excessive wear or other harmful effects, the electrical and mechanical stresses occurring in use.

18.1.1 Compliance shall be checked by the following test.

In switched connection units the voltage drop across each switched pole, measured at points immediately adjacent to the switch, shall not exceed 60 mV at rated current. ^{A3} The leakage current across open poles shall not exceed 0.5 mA per pole in the new, clean and dry condition at test voltage of 110% of the rated voltage. ^{A3}

The switch shall then make and break a rated current of 13 A ± 0.4 A at $250 \text{ V} \pm 10 \text{ V}$ 15,000 times (30,000 movements), in a substantially non-inductive a.c. circuit, at a rate of approximately six complete cycles per minute at regular intervals. The periods during which the switch is "on" and "off" shall be approximately equal. The means used for operating the switch shall be such as to move the actuating member at a speed of approximately 300 mm/s both in making and breaking the circuit and shall be so positioned that the normal action of the mechanism is not interfered with in any way.

At the end of the test, the switch shall be capable of making and breaking the rated current of 13 A ± 0.4 A at $250 \text{ V} \pm 10 \text{ V}$. The switch shall be in accordance with Clause 16 and the voltage drop across each pole, measured as above, shall not exceed 75 mV. ^{A3} The leakage current across open poles shall not exceed 6.0 mA at test voltage of 110% of the rated voltage. ^{A3}

The switch shall also be in accordance with ^{A4} 15.1 ^{A4}, the test voltages of 15.1.3 being reduced by 25 %.

19 Connection of flexible cords and cord anchorage

19.1 For connection units with cord outlets

Provision shall be made for the entry and effective clamping of 2-core or 3-core circular flexible cords as given in ^{A3} Text deleted ^{A3} Table 11, Table 12, Table 13, Table 26, and Table 27 of BS 6500:2000, having nominal conductor cross-sectional areas not exceeding 1.5 mm².

The cord anchorage shall be such that the conductors are relieved from strain, including twisting, where they are connected to the terminals.

The cord anchorage shall contain the sheath. Cord anchorages shall either be of insulating material or if of metal shall be provided with an insulating lining fixed to the metal parts.

Methods such as tying the flexible cord into a knot or tying the ends with string, or the like, shall not be used.

19.1.1 Compliance shall be checked by inspection and by the following test.

Connection units are fitted with a 2-core circular flexible cord having a nominal conductor cross-sectional area of 0.5 mm² as given in Table 26 of BS 6500:2000. The conductors are introduced into the terminals and the terminal screws tightened just sufficiently to prevent the conductors easily changing their positions. The cord anchorage is used in the normal way, the clamping screws, if any, being tightened to a torque of two-thirds of that given in Table 2.

The assembly is then left untouched for a minimum of 24 h.

After this preparation, it shall not be possible to push the flexible cord into the connection unit to such an extent as to impair safety or so that the cord anchorage is loosened.

The flexible cord is then subjected 25 times to the pull given in Table 4. The pulls are applied without jerks in the most unfavourable position momentarily. Immediately afterwards, the flexible cord is subjected for 60 ⁺⁵₀ s to the appropriate torque shown in Table 4, at a minimum distance of 150 mm from the cord entry.

NOTE It is not intended that the dimension of 150 mm is maintained during the application of the test torque.

Table 4 — Cord grip tests related to size of flexible cable or cord

Flexible cable or cord size outgoing mm ²	Cord grip tests	
	Load ⁺² ₀ % kg	Torque ^a N·m
0.50	3	0.15
1.50	6	0.35

^a The recording of a measured value of torque in accordance with this table is considered to comply with this part of BS 1363 on condition that the uncertainty of measurement at not less than 95 % confidence level does not exceed ±10 %.

The above tests are repeated but with the connection unit fitted with a 3-core flexible cord having a nominal conductor cross-sectional area of 1.5 mm² as given in Table 27 of BS 6500:2000.

After the tests the flexible cord shall not have been displaced by more than 2 mm.

For the measurement of longitudinal displacement, a mark is made on the cord, whilst it is subjected to the load given in Table 4, at a point adjacent to the anchorage in the case of cord outlet connection units, before starting the tests. After the test, the displacement of the mark on the flexible cord in relation to the cord anchorage is measured whilst the cord is again subjected to the load given in Table 4.

19.2 Cord anchorages shall anchor the cord securely to the connection unit, when installed as in normal use. The design shall ensure the following:

- the cord anchorage cannot be released from the outside without the use of a tool;
- it shall not be possible to touch cord anchorage screws, if any, with test probe B of BS EN 61032:1998 when the connection unit is energized;
- the cord is not clamped by a metal part bearing directly on the flexible cord;
- at least one part of the anchorage is securely fixed to the connection unit;
- clamping the flexible cord does not require the use of a special purpose tool.

19.2.1 Compliance shall be checked by inspection and test.

19.3 Screws which are used when clamping the flexible cord shall not serve to fix any other components unless the connection unit is rendered manifestly incomplete if the component is omitted or is replaced in an incorrect position, or the component intended to be fixed cannot be removed without further use of a tool.

19.3.1 Compliance shall be checked by inspection.

19.4 The cord entry to a cord outlet connection unit shall be so shaped as to prevent damage to the cord.

19.4.1 Compliance shall be checked by inspection.

20 Mechanical strength

20.1 Connection units shall have adequate mechanical strength and be so constructed as to withstand such handling as may be expected in normal use.

20.1.1 Compliance shall be checked by the tests given in **20.1.2** and **20.1.3**.

Any decorative cover, cover plates or parts thereof, not providing protection against electric shock, shall be removed prior to testing.

20.1.2 A solid link of stainless steel as shown in Figure 19 is inserted and withdrawn from the fuse clips 20 times in succession in a normal manner, not in misuse conditions, at a rate not exceeding 10 per minute. A standard fuse-link complying with BS 1362:1973 is then fitted and the test given in **20.1.3** is completed.

20.1.3 Connection units are tested with the impact test apparatus shown in Figure 21a). The pendulum consists of a steel tube with an external diameter of 9 mm nominal and a wall thickness of 0.5 mm nominal suspended in such a way that it swings only in a vertical plane. A hammer is rigidly fixed to the lower end.

The striking element has a hemispherical face made of polyamide having a Rockwell hardness of $85 \leq \text{HRR} \leq 100$, or hornbeam, and a radius of $10 \text{ mm} \pm 0.5 \text{ mm}$ [see Figure 21b)]. The design of the apparatus is such that a force of between 1.9 N and 2 N has to be applied to the face of the hammer to maintain the pendulum in a horizontal position.

The connection unit is mounted on a sheet of plywood approximately 8 mm thick and 175 mm square, secured at its top and bottom edges to a mounting support.

The mounting support [see Figure 21c)], having a mass of $10 \text{ kg} \pm 1 \text{ kg}$, is mounted on a rigid bracket by means of pivots. The bracket is mounted on a frame which is fixed to a solid wall.

The design of the mounting assembly shall be such that:

- a) the specimen can be so placed that the point of impact lies in the vertical plane through the axis of the pendulum pivot;
- b) the specimen can be moved horizontally and turned about an axis perpendicular to the surface of the plywood;
- c) the plywood can be turned about a vertical axis.

The connection unit is mounted on the plywood as in normal use.

Flush connection units and their boxes (if any) are placed in a block of hardwood which is itself fixed to the sheet of plywood.

The wood used shall have the direction of the wood fibres perpendicular to the direction of impact.

To simulate the condition of normal use the rear of the plate is flush with the surface of the block. The front edge of the box is between 2.5 mm and 5 mm behind the face of the block.

The connection unit is placed so that the point of impact lies in the vertical plane through the axis of the pivot of the pendulum. For all tests the hammer falls from a height of 150_{-5}^0 mm measured vertically between the point of impact on the specimen and the face of the hammer at the point of release. Ten blows are applied to points evenly distributed over the connection unit. The fuse carrier and any lens incorporated in a connection unit receives one blow of the hammer at a point approximately at its centre. One of the 10 blows of the hammer is applied to the actuating member, if any.

After the test the connection unit shall still be in accordance with Clause 8, Clause 9 and Clause 15. After the test on a lens, the lens may be cracked and/or dislodged, but it shall not be possible to touch live parts using test probe 13 of BS EN 61032:1998 applied with a maximum force of 5 N, and applied in accordance with 9.1.1.

Damage to the finish, small dents which do not reduce creepage distances and clearances below the values specified in Clause 8, and small chips that do not adversely affect the protection against electric shock or moisture shall be ignored.

Cracks not visible with normal or corrected vision without additional magnification, and surface cracks in fibre reinforced mouldings and the like shall be ignored.

21 Screws, current-carrying parts and connections

21.1 Screwed connections, electrical and otherwise, shall withstand the mechanical stresses occurring in normal use. Screws directly transmitting electrical contact pressure shall screw into metal. Screws shall not be of metal which is soft and liable to creep.

Screws shall not be of insulating material if their replacement by a metal screw would affect the safety or performance requirements of the connection unit.

Contact pressure in electrical connections within the connection unit and between the connection unit and the cable or flexible cord connected to it shall not be transmitted through insulating material other than ceramic, pure mica or other material with characteristics no less suitable, unless there is sufficient resiliency in the metallic parts to compensate for any possible shrinkage or yielding of the insulating material.

NOTE The suitability of the material is considered in respect of the stability of the dimensions under all conditions of normal use especially in view of shrinking, ageing or cold flow of the insulating part.

21.1.1 Compliance shall be checked by inspection and, for screws and nuts which are intended to be tightened during installation or use, or during replacement of a fuse-link, by the following test.

The screw is tightened and loosened as follows:

- a) 10 times for screws in engagement with a thread of insulating material, the screw being completely removed and replaced each time;
- b) five times for nuts and other screws.

When testing terminal screws and nuts, a 2.5 mm² solid conductor is placed in the terminal in the case of fixed wired connection units, or a 1.5 mm² flexible conductor in the case of flexible cord outlet connection units. The conductor is moved each time the screw is loosened.

The test is made by means of a suitable test screwdriver, applying a torque as given in Table 2.

During the test no damage impairing the further use of the screwed connection shall occur.

NOTE It is essential that the shape of the blade of the test screwdriver suits the head of the screw being tested and that the screw is not tightened in jerks.

21.2 Thread-cutting and/or thread-forming screws shall not be used for the connection of current-carrying parts.

NOTE Thread-forming screws may be used to provide earthing continuity, provided that it is not necessary to disturb the connection in normal use and at least two screws are used for each connection.

Screws which make a mechanical connection between different parts of the connection unit shall be locked against loosening, if the connection carries current.

Rivets used for current-carrying or earth continuity connections shall be locked against loosening, if these connections are subject to torsion in normal use which is likely to loosen the connection.

21.2.1 Compliance shall be checked by inspection and by manual test.

NOTE 1 Spring washers and the like may provide satisfactory locking.

NOTE 2 For rivets a non-circular shank or an appropriate notch may be sufficient.

21.3 Current-carrying parts ~~(A4) Text deleted (A4)~~ shall be of brass, copper, phosphor-bronze or other metal at least equivalent with regard to its conductivity, and resistance to corrosion.

NOTE This requirement does not apply to screws, nuts, washers, clamping plates and similar parts of terminals, nor to parts of connection units used for earth continuity purposes.

21.3.1 Compliance shall be checked by inspection and by the relevant tests described in 10.1 and Clause 16 and Clause 24.

22 Resistance to heat

22.1 Connection units shall be resistant to heat.

22.1.1 Compliance shall be checked as follows.

NOTE Parts made from rubber or ceramics in connection units are not subjected to these tests.

For complete connection units and for separate ancillary components, samples are kept for 60^{+5}_0 min in a heating cabinet maintained at the following temperature:

- a) $100\text{ °C} \pm 5\text{ °C}$ for connection units;
- b) $70\text{ °C} \pm 5\text{ °C}$ for mounting boxes, separate covers and separate cover plates.

During the test they shall not undergo any change impairing their further use and sealing compound shall not flow to such an extent that live parts are exposed. A slight displacement of the sealing compound shall be disregarded.

After the test the connection units shall comply with **9.1.1** and **15.1.3**, and it shall not be possible to touch live parts with test probe 11 of BS EN 61032:1998 applied with a force of 30^{+0}_{-2} N.

22.2 Parts of insulating material shall be sufficiently resistant to heat having particular regard to their location and function in the complete connection unit.

22.2.1 Compliance shall be checked as follows:

- a) parts of ceramic material are deemed to comply without testing;
- b) all other parts of insulating material shall be subjected to the ball pressure test A_4 in accordance with BS EN 60695-10-2:2003 A_4 .

A_4 The test temperatures shall be as given below. A_4

For parts of insulating material necessary to retain current-carrying parts in position, the test temperature shall be $125\text{ °C} \pm 5\text{ °C}$.

For parts of insulating material not necessary to retain current-carrying parts in position, even though they may be in contact with them, the test temperature shall be $75\text{ °C} \pm 5\text{ °C}$.

A_4 Text deleted A_4

A_3 23 Resistance to abnormal heat and fire A_3

23.1 General

A_3 Connection units shall be proof against abnormal heat and fire. A_3

23.1.1 Compliance shall be checked by the test given in **23.2**.

The tests shall not be made on parts of ceramic material or metal.

23.2 Glow wire test

The test is performed in accordance with A_4 BS EN 60695-2-11:2001 A_4 at the test temperature given in Table 5.

Table 5 — Application of glow-wire test

Part	Temperature of glow-wire °C
Parts necessary to retain live parts in position	850 ± 15
Parts not necessary to retain live parts in position (although they may be in contact with live parts)	650 ± 10

NOTE If the test specified is required to be made at more than one place on the same specimen, it is essential that care is taken to ensure that any deterioration caused by previous tests does not affect the result of the test to be made.

A_4 Small parts (see **3.28**), parts of insignificant mass (see **3.27**), parts unlikely to be subjected to abnormal heat and parts whose failure to pass these tests would not materially affect the safety of the connection unit are not subjected to this glow-wire test. A_4

The glow-wire test is applied to ensure that an electrically heated test wire under defined test conditions does not cause ignition of insulating parts or to ensure that a part of insulating material which might be ignited by the heated test wire under defined conditions has a limited time to burn without spreading fire by flame or burning parts or droplets falling down from the tested part onto a pinewood board covered with tissue paper.

The test specimen shall be either a complete connection unit or, if the test cannot be made on a complete connection unit, a suitable part may be cut from one for the purpose of the test.

The test is made on one specimen.

In case of doubt, the test shall be repeated on two further specimens.

The test shall be made, applying the glow-wire once.

The specimen shall be positioned during the test in the most unfavourable position of its intended use (with the surface tested in a vertical position).

The tip of the glow-wire shall be applied to the specified surface of the specimen taking into account the conditions of the intended use under which a heated or glowing element may come into contact with the specimen.

The specimen shall be regarded as having passed the glow-wire test if:

- a) there is no visible flame and no sustained glowing; or
- b) flames and glowing at the specimen extinguish within 30 s after the removal of the glow-wire.

There shall be no ignition of the tissue paper or scorching of the board.

24 Resistance to excessive residual stresses and to rusting

24.1 Press-formed or similar current-carrying parts of copper alloy containing less than 80 % of copper shall be resistant to failure in use due to stress corrosion.

24.1.1 Compliance shall be checked by the following test.

The specimen is degreased in a suitable alkaline degreasing solution or organic solvent, then immersed in an aqueous solution of mercurous nitrate containing 10 g of $\text{Hg}_2(\text{NO}_3)_2$ and 10 ml of HNO_3 (relative density 1.42) per litre of solution for 30 min \pm 1 min at a temperature of 20 °C \pm 5 °C.

NOTE Attention is drawn to the fact that due precautions should be taken when using these liquids as they are toxic.

After the treatment, the specimen is washed in running water, any excess mercury is wiped off, and the specimen is immediately visually examined.

There shall be no cracks visible with normal or corrected vision without additional magnification.

24.2 Ferrous parts, the rusting of which might cause the connection unit to become unsafe, shall be adequately protected against rusting.

24.2.1 Compliance shall be checked by the following test.

The specimen is degreased in a suitable alkaline degreasing solution or organic solvent, the parts are then immersed for 10 min \pm 0.5 min in a 10 % solution of ammonium chloride in water at a temperature of 20 °C \pm 5 °C.

Without drying but after shaking off any drops, the parts are placed for 10 min \pm 0.5 min in a box containing air saturated with moisture at a temperature of 20 °C \pm 5 °C. After the parts have been dried for at least 10 min in a heating cabinet at a temperature of 100 °C \pm 5 °C their surfaces shall show no signs of rust.

NOTE 1 Traces of rust on sharp edges and any yellowish film removable by rubbing should be ignored.

NOTE 2 For small helical springs and the like, and for parts exposed to abrasion, a layer of grease may provide sufficient protection against rusting. Such parts are subjected to the test if there is doubt about the effectiveness of the grease film and the test should then be made without previous removal of the grease.

25 (Not used)

Annex A (normative)**The construction and calibration of a calibrated link****A.1 Construction**

The calibrated link (see Figure 28) shall employ the following components used to produce fuses complying with BS 1362:1973.

- a) ceramic body (as standard);
- b) filling (as standard);
- c) end caps [modified standard cap as shown in Figure 28a)].

The resistive element shall be of copper nickel wire having a resistivity value between $44 \mu\Omega \cdot \text{cm}$ and $49 \mu\Omega \cdot \text{cm}$. The overall length shall be $25.4^{+0.8}_{-0.4}$ mm and the diameter such as to allow a small reduction in the cross-sectional area to adjust the watts loss to the required value. The ends are turned down so that the distance between the shoulders so formed shall be $25.4^{+0.8}_{-0.4}$ mm less twice the end cap end wall thickness T [see Figure 28b)].

The resistive element shoulders shall be firmly butted to the inside faces of the end caps and soldered using a tin silver solder, grade 96S as specified in BS 219:1977. The assembly thus formed [see Figure 28c)] shall be checked for watts loss in accordance with A.2. Metal shall then be carefully filed from the resistive element over as long a length as is possible and the assembly rechecked until the desired watts loss is achieved.

One end cap shall then be unsoldered, a standard ceramic body fitted, the cavity filled and the end cap resoldered in position making sure the shoulder of the element is butted to the inside face of the end cap; the ceramic body shall not interfere with this condition. [See Figure 28d)].

The watts loss shall be rechecked in accordance with A.2 and adjusted if necessary.

The resulting calibrated link shall be marked "NOT A FUSE" on the ceramic body and shall dimensionally be in accordance with BS 1362:1973.

A.2 Calibration

The calibration jig shown in Figure 29 is mounted horizontally approximately 25 mm above a wooden board by means of two ceramic pillars. A fine wire thermocouple is attached to the centre of each fuse contact clip, on the outside of the top edge, in such a way that it does not interfere with the contact area.

The thermocouples are taken out of the box in slots cut in one end of the jig base, the width of the slots just being sufficient to accept the diameter of the thermocouples. The connection to the jig base shall be by means of PVC insulated single-core copper cables, $0.3 \text{ m} \pm 0.05 \text{ m}$ in length and 2.5 mm^2 cross section. The surroundings shall be free from draughts and the ambient air temperature, measured by a suitable thermometer or thermocouple at a horizontal distance of 1 m to 2 m from the standard link, shall be in the range of 15°C to 25°C . The standard link shall be inserted into the clips provided in the calibration jig and the cover replaced. A current of $13 \text{ A} \pm 0.1 \text{ A}$ is then passed continuously through the calibrated link for $60 \text{ min} \pm 5 \text{ min}$. At the end of this time, the temperatures measured by the thermocouples are noted, the cover of the jig is then removed and the millivolt drop between the end surfaces of the end caps of the calibrated link is measured whilst it is still carrying the test current.

A.C. voltage shall be used for the calibration.

The calibration is considered to be correct when the following apply:

- a) the product of the measured millivolt drop multiplied by the test current gives a result of: $1^{0.00}_{-0.05}$ W;
- b) the temperature difference between the fuse contact clips does not exceed 2°C .

Annex B (normative)**Measurement of clearances and creepage distances**

The width X specified in Examples 1 to 11 apply to all examples as a function of the pollution degree as given in Table B.1.

Table B.1 — Minimum values of width X

Pollution degree	Minimum values of width X mm
1	0.25
2	1.0
3	1.5

If the associated clearance is less than 3 mm, the minimum groove width may be reduced to one-third of this clearance.

The methods of measuring creepage distance and clearances are indicated in the following Examples 1 to 11. These cases do not differentiate between gaps and grooves or between types of insulation.

The following assumptions are made:


- any recess is assumed to be bridged with an insulating link having a length equal to the specified width X and being placed in the most unfavourable position (see Example 3);
- where the distance across a groove is equal to or larger than the specified width X, the creepage distance is measured along the contours of the groove (see Example 2);
- creepage distances and clearances measured between parts which can assume different positions in relation to each other, are measured when these parts are in their most unfavourable position.

Explanation for Examples 1 to 11

----- clearance

===== creepage distance

All dimensions are in millimetres

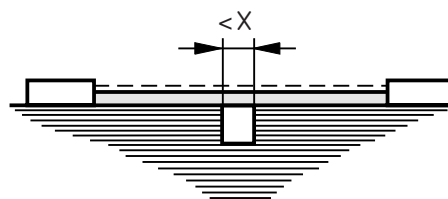


Example 1

Example 1

Condition: Path under consideration includes a parallel- or converging-sided groove of any depth with a width less than "X" mm.

Rule: $\overline{A_4}$ Creepage distance $\overline{A_4}$ and clearance are measured directly across the groove as shown.

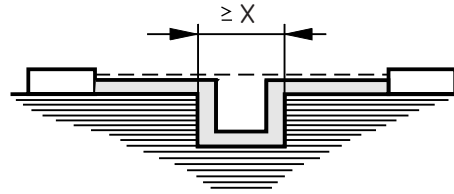


Example 2

Example 2

Condition: Path under consideration includes a parallel-sided groove of any depth and with a $\square A_4$ width equal to or greater than $\langle A_4 \rangle$ "X" mm.

Rule: Clearance is the "line of sight" distance. Creepage path follows the contour of the groove.

$\square A_4$

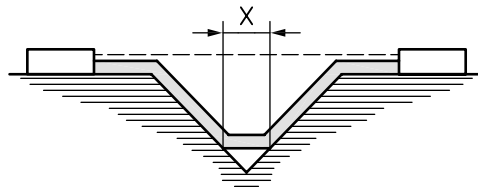


Example 3

Example 3

Condition: Path under consideration includes a V-shaped groove with a width greater than "X" mm.

Rule: Clearance is the "line of sight" distance. Creepage path follows the contour of the groove but "short circuits" the bottom of the groove by an "X" mm link.

$\langle A_4 \rangle$

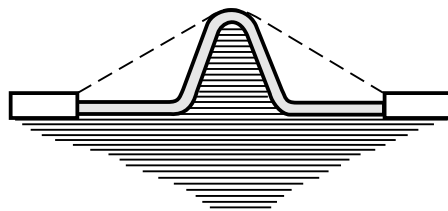


Example 4

Example 4

Condition: Path under consideration includes a rib.

Rule: Clearance is the shortest direct air path over the top of the rib. Creepage path follows the contour of the rib.

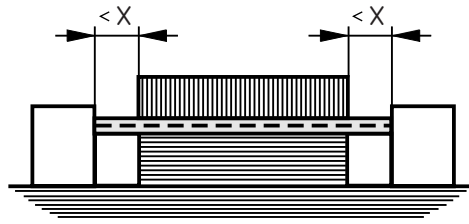


Example 5

Example 5

Condition: Path under consideration includes an uncemented joint with grooves less than “X” mm wide on each side.

Rule: Creepage and clearance path is the “line of sight” distance shown.

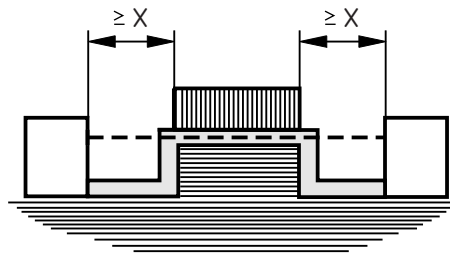


Example 6

Example 6

Condition: Path under consideration includes an uncemented joint with grooves equal to or more than “X” mm wide on each side.

Rule: $\sqrt{A_4}$ Clearance path is the “line of sight” distance. $\sqrt{A_4}$ Creepage follows the contour of the grooves.

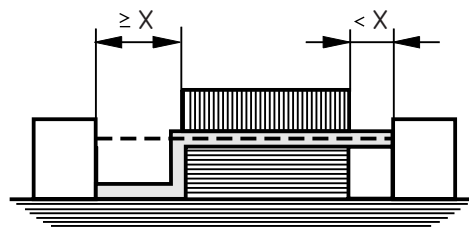


Example 7

Example 7

Condition: Path under consideration includes an uncemented joint with groove on one side less than “X” mm wide and the groove on the other side equal to or more than “X” mm wide.

Rule: Clearance and creepage paths are as shown.

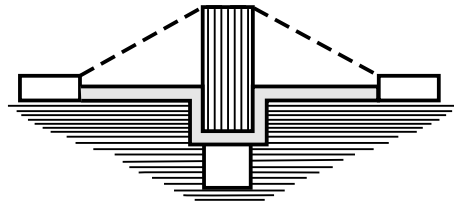

Example 8



Example 8

Condition:

Path under consideration includes a barrier with an uncemented joint. The creepage distance through the uncemented joint is less than the creepage distance over the barrier.

Rule:

Clearance is the shortest direct air path over the top of the barrier. The creepage path follows the contour of the joint.

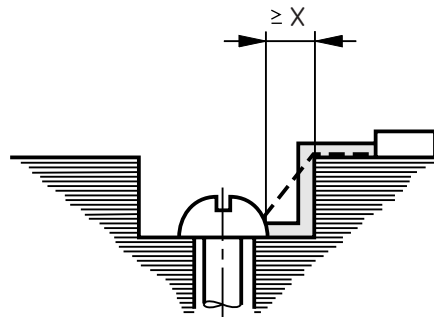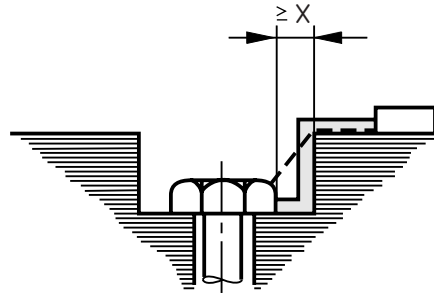

Example 9



Example 9

Condition:

Gap between head of screw and wall of recess wide enough to be taken into account (greater than or equal to "X" mm).

Rule:

Clearance and creepage distance paths are as shown.

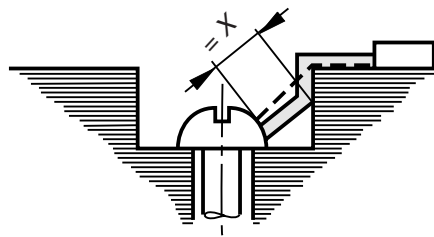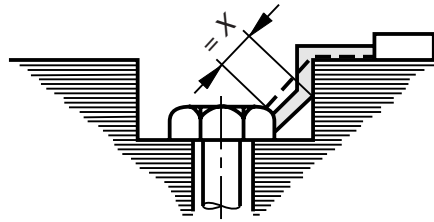


Example 10

Example 10

A4 Condition: Gap between head of screw and wall of recess too narrow to be taken into account (less than "X" mm). **A4**

A4 Rule: Measurement of clearance and creepage distance is from the screw head to the point on the wall which is at a distance equal to "X" mm (as shown). **A4**

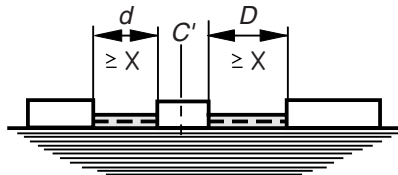

Example 11

Example 11

A4 Condition: Path under consideration includes a floating part, C' , with different sized grooves either side, each greater than or equal to "X" mm. **A4**

A4 Rule: Clearance and creepage distance are both distance $d + D$. **A4**

Annex C (normative)**Determination of the Comparative Tracking Index (CTI) and Proof Tracking Index (PTI)**

A3 The CTI or PTI is determined in accordance with BS EN 60112.

For the purpose of this standard the following applies.

- a) In Clause 5 of BS EN 60112:2003, Test specimen:
 - Note 3 and the last paragraph also apply to PTI;
 - If the surface 15 mm × 15 mm cannot be obtained because of the small dimensions of the PT system then special samples made with the same manufacturing process may be used.
- b) The test solution “A” described in 7.3 of BS EN 60112:2003 shall be used.
- c) In Clause 8 of BS EN 60112:2003, Procedure, either CTI or PTI is determined.
 - CTI is determined in accordance with Clause 11 of BS EN 60112:2003.
 - The PTI test of Clause 10 of BS EN 60112:2003 is performed on five samples at the voltage referred to in 10.1 of BS EN 60112:2003 based on the appropriate creepage distance, material group, pollution degree conditions and on the rated voltage of this standard declared by the manufacturer. **A3**

Annex D (normative)**Relation between rated impulse withstand voltage, rated voltage and Overvoltage Category**

Table D.1 — Rated impulse withstand voltage for connection units energized directly from the low voltage mains

Nominal voltage of the supply system based on IEC 60038 ^a	Voltage line to neutral derived from nominal voltages a.c. or d.c. up to and including	Rated impulse withstand voltage		
		Overvoltage Category		
V	V	I	II	III
230/400	300	1 500	2 500	4 000

NOTE 1 For more information concerning supply systems see BS EN 60664-1.

NOTE 2 For more information concerning Overvoltage Category see BS EN 60664-1.

NOTE 3 Connection units fall into Overvoltage Category III. Parts of connection units where appropriate overvoltage reduction is provided fall into Overvoltage Category I. Energy consuming equipment falls into Overvoltage Category II.

^a The / mark indicates a four-wire three-phase distribution system. The lower value is the voltage line-to-neutral, while the higher value is the voltage line-to-line.

Annex E (normative)

Pollution degree

The micro-environment determines the effect of pollution on the insulation. The macro-environment, however, has to be taken into account when considering the micro-environment.

Means may be provided to reduce pollution at the insulation under consideration by effective use of enclosures, encapsulation or hermetic sealing. Such means to reduce pollution may not be effective when the PT-system is subject to condensation or if, in normal operation, it generates pollutants itself.

Small clearances can be bridged completely by solid particles, dust and water and therefore minimum clearances are specified where pollution may be present in the micro-environment.

NOTE Pollution will become conductive in the presence of humidity. Pollution caused by contaminated water, soot, metal or carbon dust is inherently conductive.

Degrees of pollution in the micro-environment

For the purpose of evaluating creepage distances and clearances, the following three degrees of pollution in the micro-environment are established.

— Pollution degree 1

No pollution or only dry, non-conductive pollution occurs. The pollution has no influence.

— Pollution degree 2

Only non-conductive pollution occurs except that occasionally a temporary conductivity caused by condensation is to be expected.

— Pollution degree 3

Conductive pollution occurs or dry non-conductive pollution occurs which becomes conductive due to condensation which is to be expected.

Annex F (normative)

Impulse voltage test

The purpose of this test is to verify that clearances will withstand specified transient overvoltage. The impulse withstand voltage test is carried out with a voltage having a 1.2/50 μ S waveform as specified in A_4 BS EN 61180-1:1995, Section 6 A_4 and is intended to simulate overvoltage of atmospheric origin. It also covers overvoltages due to switching of low-voltage equipment.

The test shall be conducted for a minimum of three impulses of each polarity with an interval of at least 1 s between pulses. A_4 There shall be no discharges during the test. Glow discharges without a drop in voltage shall be ignored. A_4

A_4 For solid insulation and for clearances not checked by measurement, the impulse withstand voltage shall be applied between:

- a) line and neutral terminals/terminations;
- b) line and neutral terminals/terminations connected together and:
 - 1) a sheet of metal foil in contact with the entire accessible external surface;
 - 2) the earthing terminal/termination;
 - 3) any metal part of a cord anchorage;
- c) each switched pole terminal of a switched connection unit with the switch contacts open. A_4

NOTE 1 The output impedance of the impulse generator should be not higher than 500 Ω .

A_4 NOTE 2 The expression “discharge” is used to cover the phenomena associated with the failure of insulation under electric stress, which include current flow and a drop in voltage. A_4

The impulse shall have the following characteristics:

- the waveform 1.2/50 μ S for the no load voltage with amplitudes equal to the values given in Table F.1;
- A_4 Text deleted A_4

NOTE 3 If the sample is provided with surge suppression the impulse voltage wave may be chopped but the sample should be in a condition to operate normally again after the test. If the sample is not provided with surge suppression and it withstands the impulse voltage, the waveform will not be noticeably distorted.

Table F.1 — Test voltages for verifying clearances at sea level

Rated impulse withstand voltage \hat{U} kV	Impulse test voltage at sea level \hat{U} kV
0.33	0.35
0.5	0.55
0.8	0.91
1.5	1.75
2.5	2.95
4.0	4.8
6.0	7.3

NOTE 1 When testing clearances, associated solid insulation will be subjected to the test voltage. As the impulse test voltage of Table F.1 is increased with respect to the rated impulse withstand voltage, solid insulation will have to be designed accordingly. This results in an increased impulse withstand capability of the solid insulation.

NOTE 2 The test may be made with the pressure adjusted to the value corresponding to the altitude of 2 000 m (80 kPa) and 20 °C with the test voltage corresponding to the rated impulse withstand voltage. In this case, solid insulation will not be subjected to the same withstand requirements as when testing at sea level.

NOTE 3 Explanations concerning the influencing factors (air pressure, altitude, temperature humidity) with respect to electric strength of clearances are given in BS EN 60664-1.




Annex G (informative)
Specific structure of BS EN 50525 and its derivation from British Standards and from HD 21 and HD 22
 (BS EN 50525-1:2011, National Annex NA)

Part number of BS EN 50525	Short title	Derivation		
		BS	Table No(s)	HD
1	General requirements	(Note 1)	(Note 1)	HD 21.1; HD 22.1
2-11	PVC flexible cables	BS 6500 BS 7919	26, 27, 28, 29 40, 41	HD 21.5; HD 21.12
2-12	Extensible leads	BS 6500	Clause 8	HD 21.10
2-21	Rubber flexible cables	BS 6500 BS 7919	12, 13, 15, 16 10-17, 20, 21, 23, 24	HD 22.4; HD 22.10; HD 22.11; HD 22.12; HD 22.16
2-22	Braided flexible cables	–	–	HD 22.14 (Clause 6)
2-31	PVC conduit wire	BS 6004	4a), 4b), 5, 11a), 11b), 12	HD 21.3; HD 21.7
2-41	Rubber single core – SiR	BS 6007	8, 9, 10	HD 22.3
2-42	Rubber single core – EVA	BS 6007	3, 4, 5, 6, 7	HD 22.7
2-51	PVC sheathed wiring	BS 6004 BS 7919	13 42, 43	HD 21.13
2-71	Tinsel flexible cables	BS 6500	24	HD 21.5 (Clause 2)
2-72	PVC separable flat	–	–	HD 21.11
2-81	Welding cable	BS 638-4	1, 2	HD 22.6
2-82	Lighting chains	–	–	HD 22.8
2-83	SiR flexible	BS 7919	22	HD 22.15
3-11	Halogen-free flexible (T/P)	–	–	HD 21.14
3-21	Halogen-free flexible (X/L)	BS 7919	18, 19	HD 22.13
3-31	Halogen-free single core (T/P)	–	–	HD 21.15
3-41	Halogen-free single core (X/L)	BS 7211	3a), 3b), 4a), 4b)	HD 22.9

NOTE 1 General requirements were given in each relevant BS as appropriate.




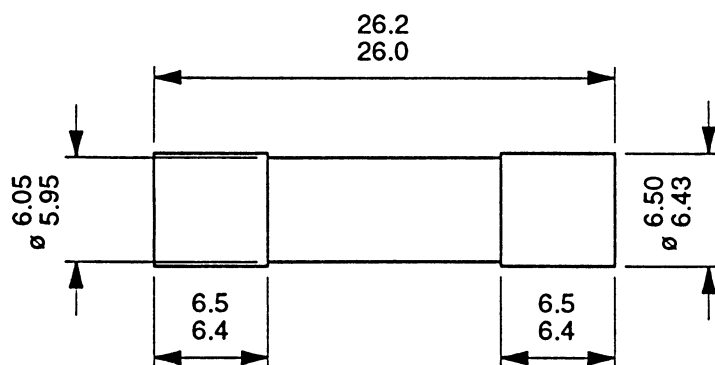

All dimensions are in millimetres.

NOTE Finish: polished and sharp corners removed.

Figure 19 — Solid link for test on fuse clips (see Clause 20)

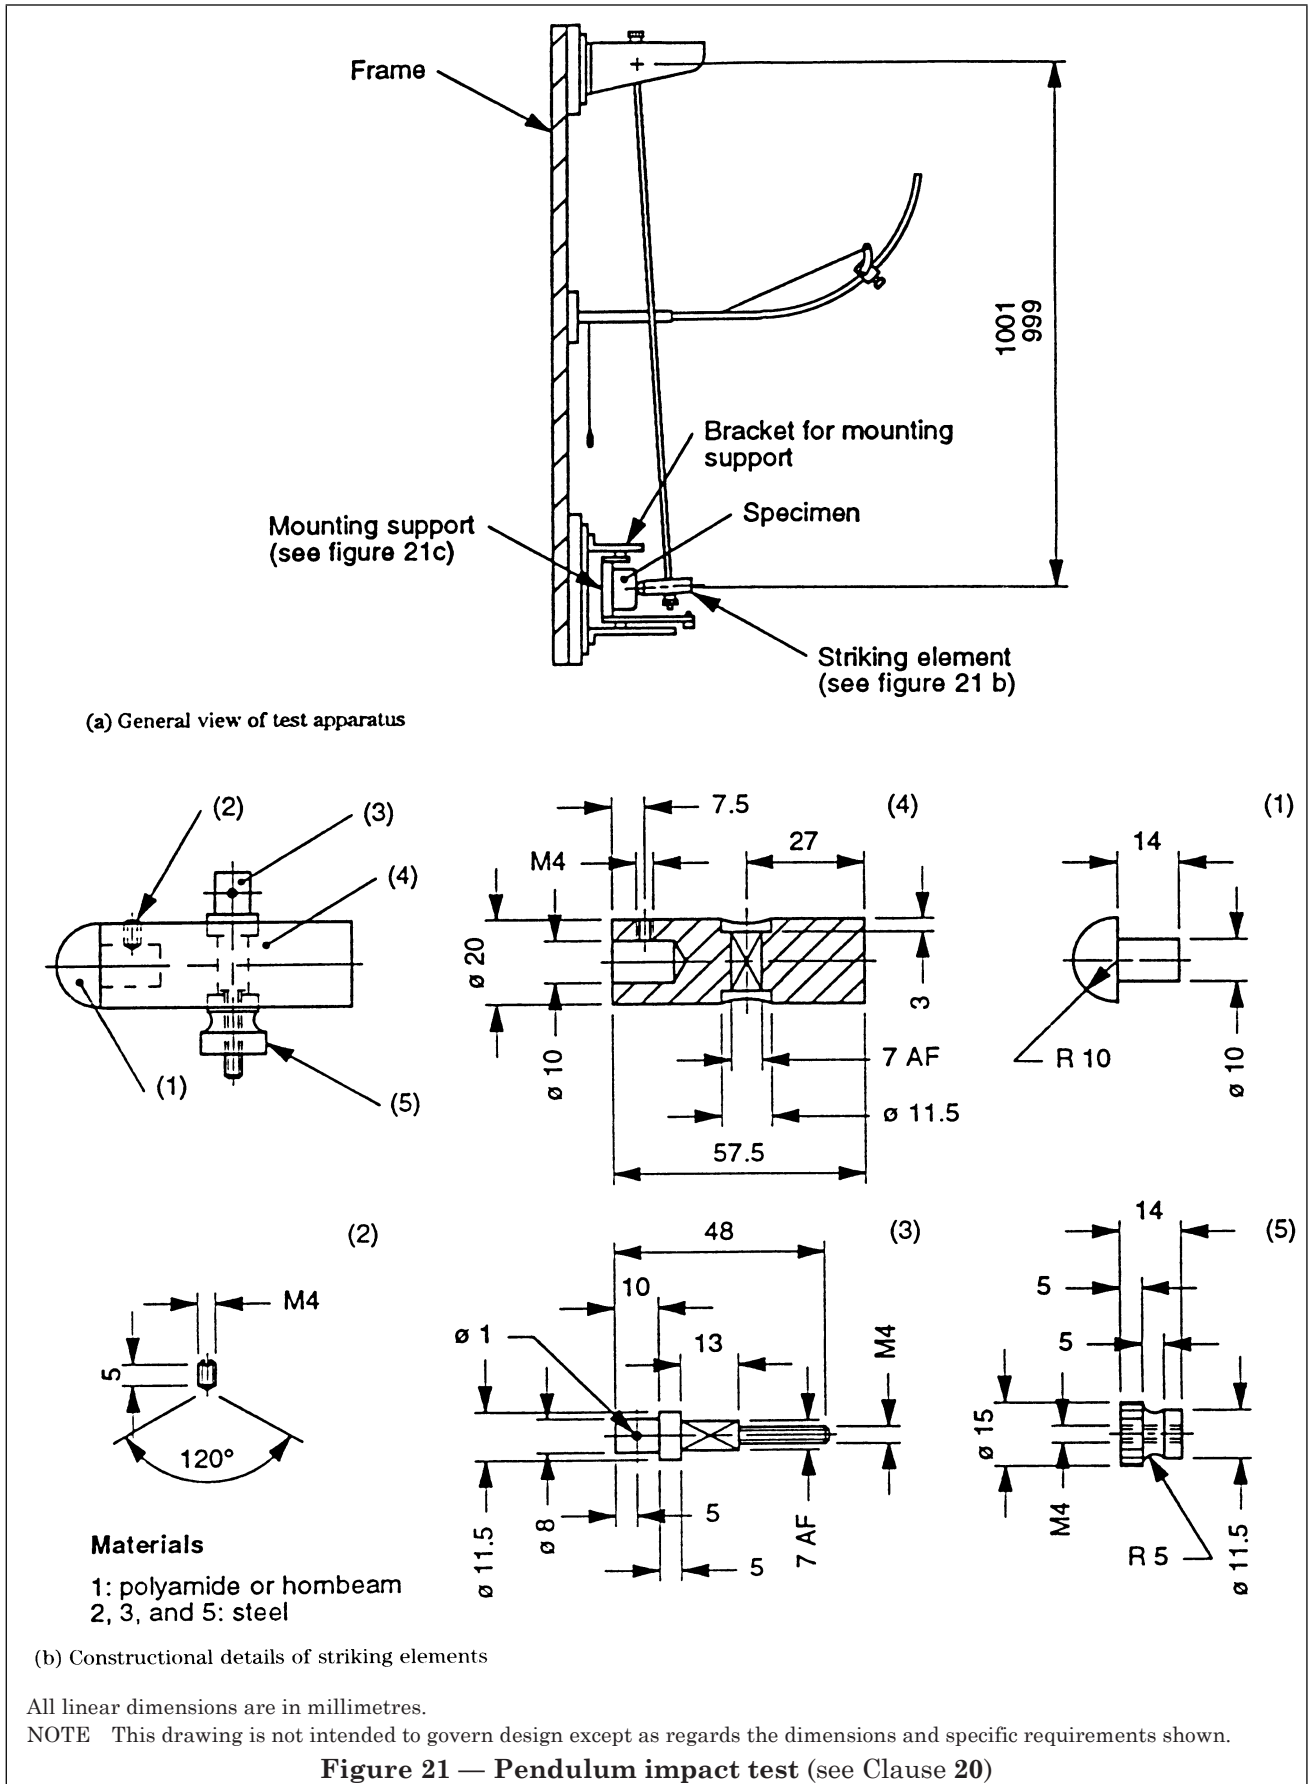



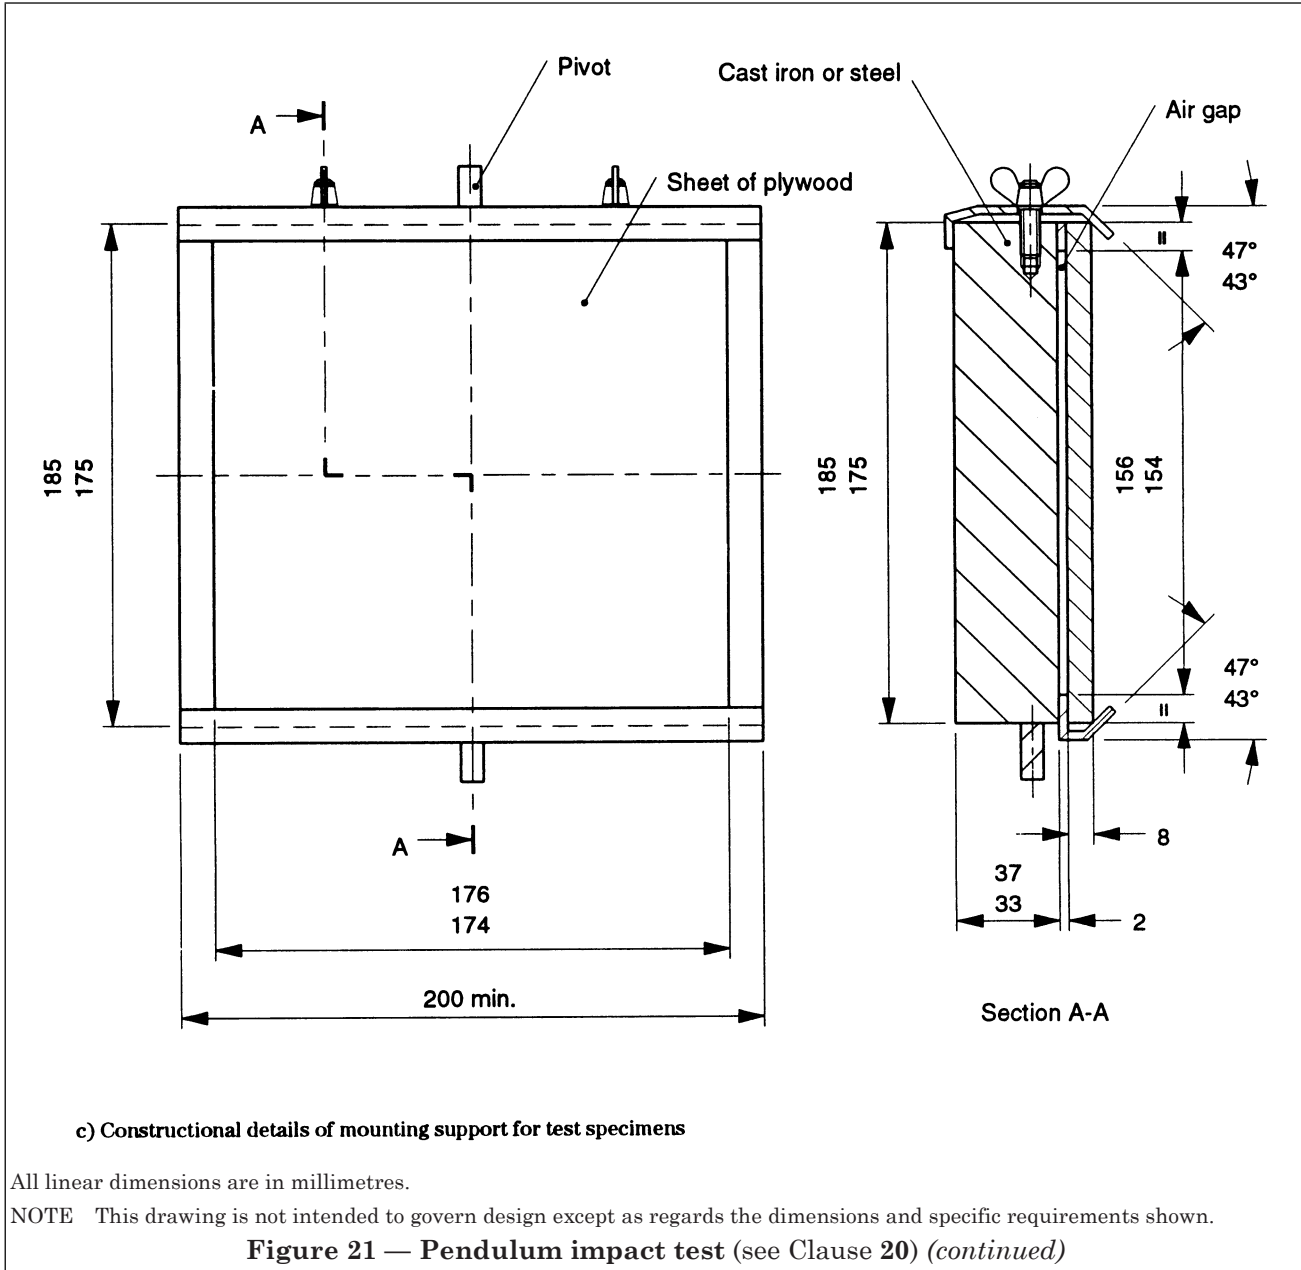


Figure 24 *Figure deleted*

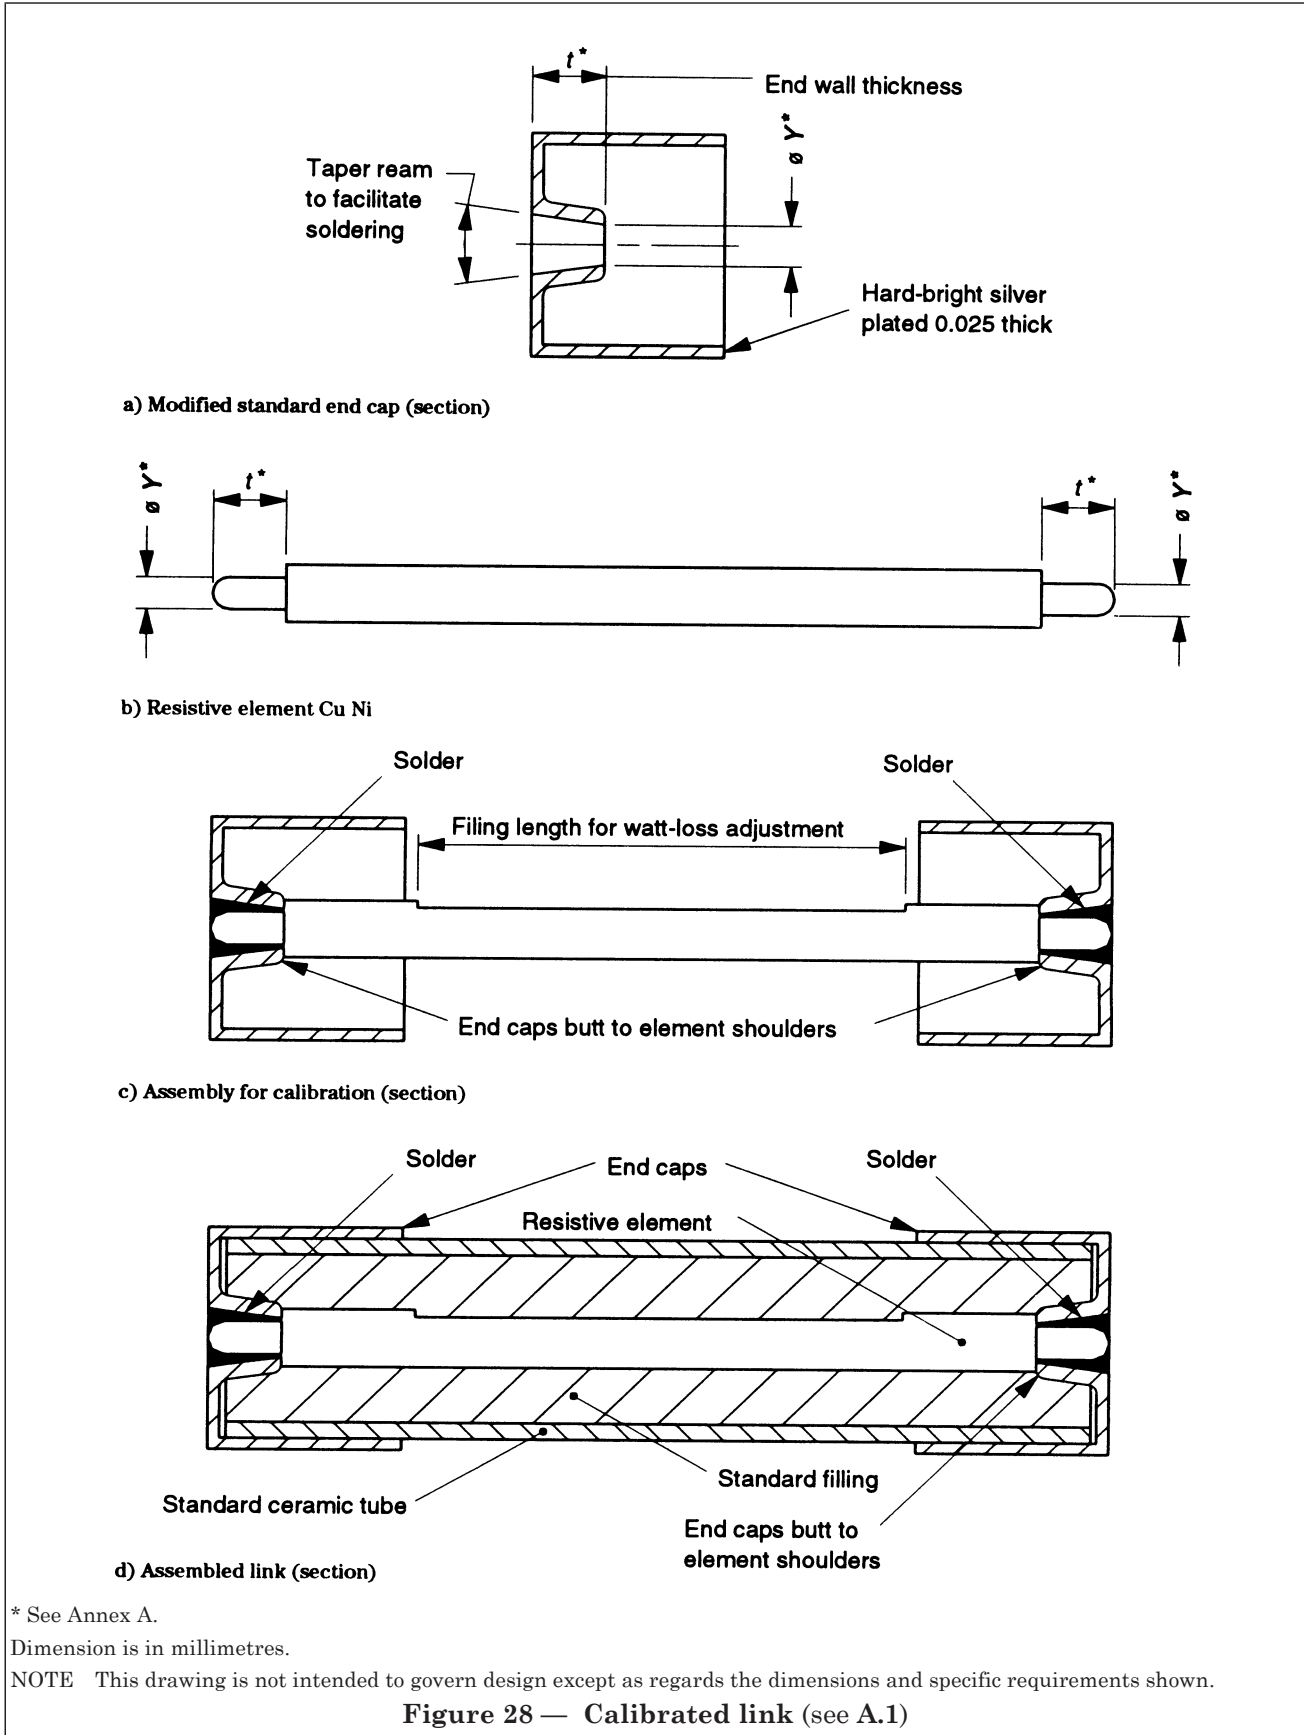

Licensed copy: Lee Shau Kee Library, HKUST, Version correct as of 03/01/2015, (c) The British Standards Institution 2013

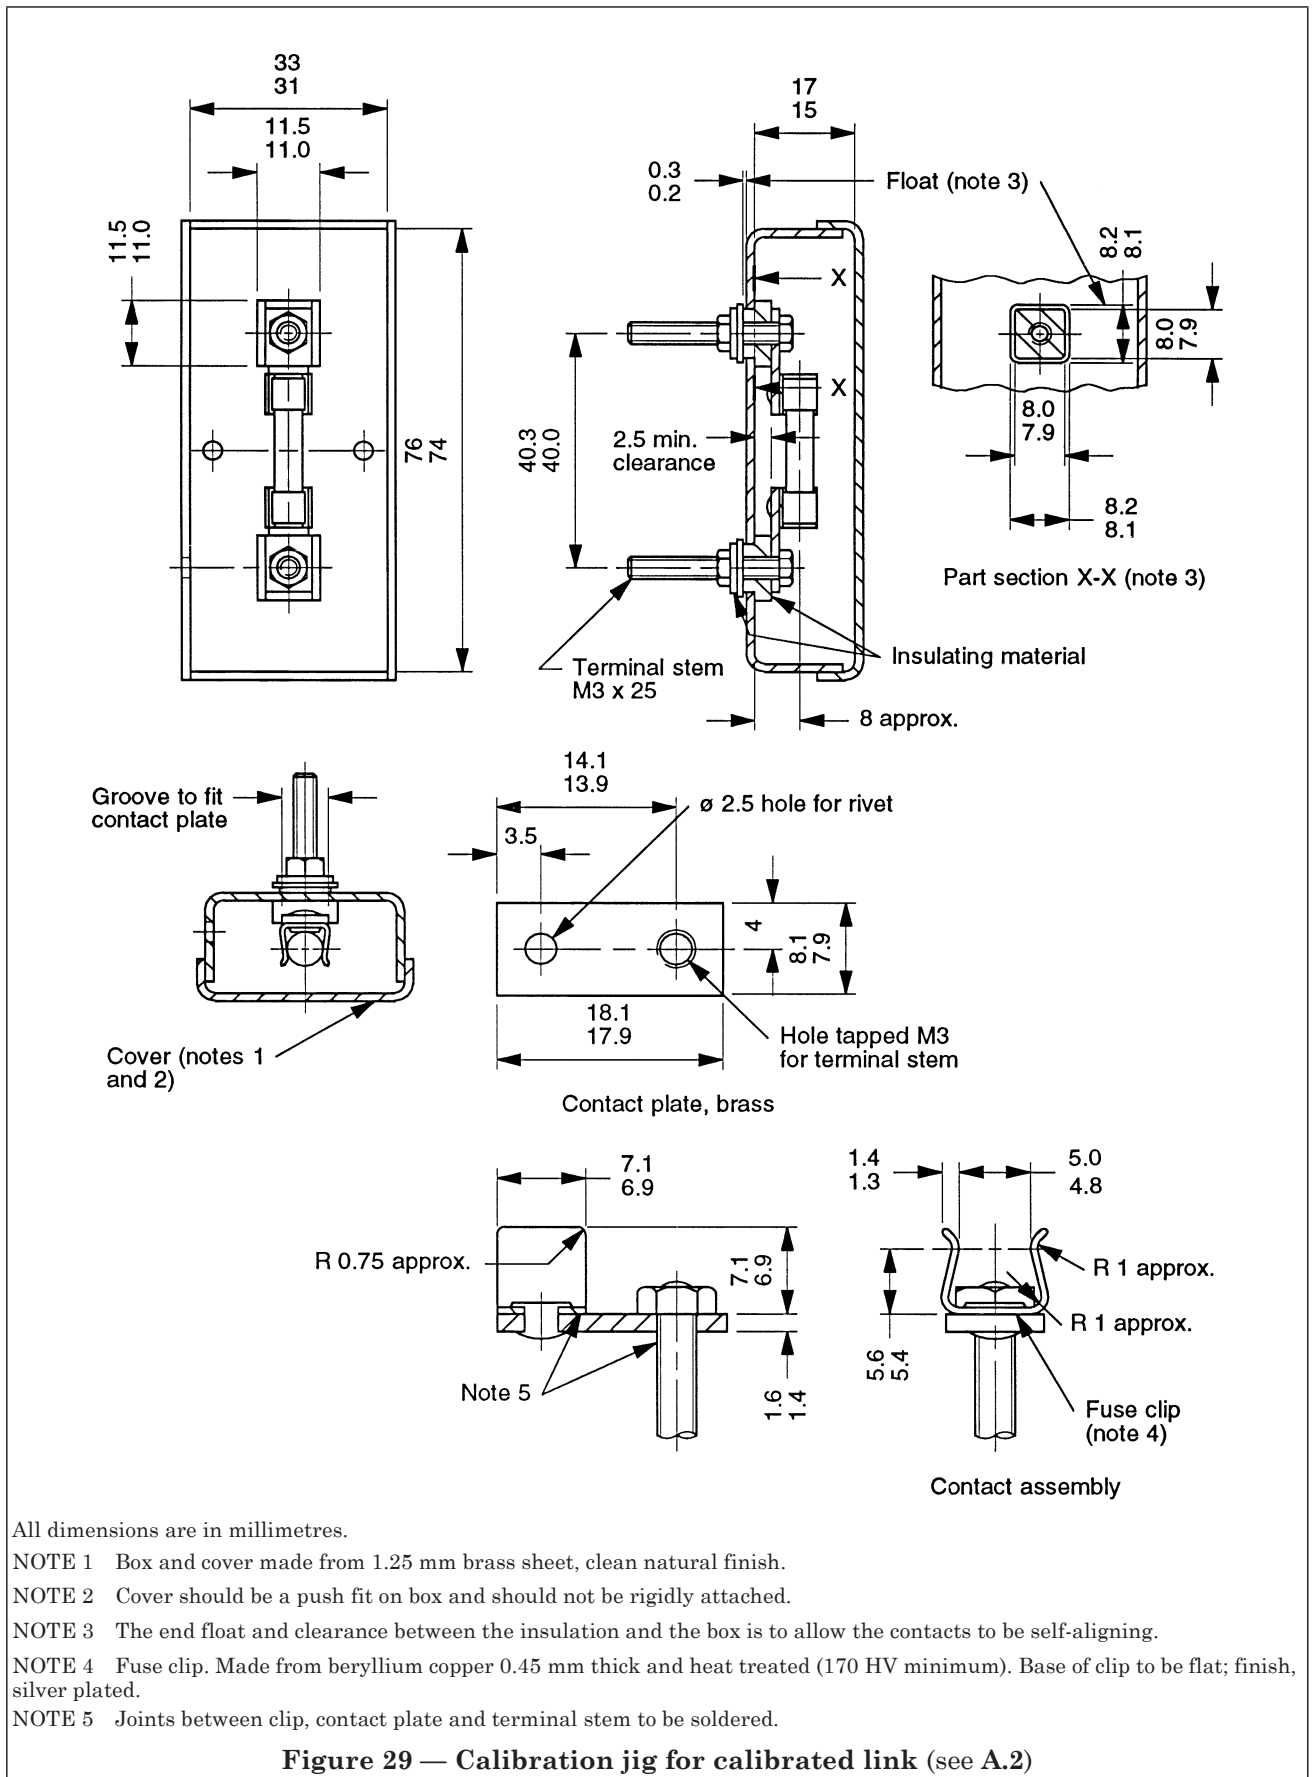

List of references

BSI publications

BS 219:1977, *Specification for soft solders.*

BS 1210:1963, *Specification for wood screws.*

BS 1362:1973, *Specification for general purpose fuse links for domestic and similar purposes (primarily for use in plugs).*

BS 1363-1:1995, *13 A plugs, socket-outlets, adaptors and connection units — Part 1: Specification for rewirable and non-rewirable 13 A fused plugs.*

BS 1363-2:1995, *13 A plugs, socket-outlets, adaptors and connection units — Part 2: Specification for 13 A switched and unswitched socket-outlets.*

BS 1363-3:1995, *13 A plugs, socket-outlets, adaptors and connection units — Part 3: Specification for adaptors.*

BS 4662:1970, *Specification for boxes for the enclosure of electrical accessories.*

BS 5901:1980, *Method of test for determining the comparative and the proof tracking indices of solid insulating materials under moist conditions.*

BS 6004:2000, *Electric cables — PVC insulated, non-armoured cables for voltages up to and including 450/750 V, for electric power, lighting and internal wiring.*

BS 6217:1981, *Guide to graphical symbols for use on electrical equipment.*

BS 6500:2000, *Electric cables — Flexible cords rated up to 300/500 V, for use with appliances and equipment intended for domestic, office and similar environments.*

^{A4} BS EN 50525, *Electric cables — Low voltage energy cables of rated voltages up to and including 450/750 V (U_0/U).* ^{A4}

^{A3} BS EN 60112:2003, *Method for the determination of the proof and the comparative tracking indices of solid insulating materials.*

BS EN 60664-1:2003, *Insulation coordination for equipment within low-voltage systems — Part 1: Principles, requirements and tests.* ^{A3}

^{A4} BS EN 60695-2-11:2001, *Fire hazard testing — Part 2-11: Glowing/hot-wire based test methods — Glow-wire flammability test method for end-products.*

BS EN 60695-10-2:2003, *Fire hazard testing — Part 10-2: Abnormal heat — Ball pressure test.* ^{A4}

BS EN 61032:1998, *Protection of persons and equipment by enclosures — Probes for verification.*

^{A4} BS EN 61180-1:1995, *Guide to high-voltage test techniques for low-voltage equipment — Part 1: Definitions, test and procedure requirements.* ^{A4}

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.
Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001.
Fax: +44 (0)20 8996 7001. Email: orders@bsi-global.com. Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.
Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: info@bsi-global.com.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.
Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001.
Email: membership@bsi-global.com.

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager.
Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553.
Email: copyright@bsi-global.com.