



Standard Terminology Relating to Natural and Artificial Weathering Tests of Nonmetallic Materials¹

This standard is issued under the fixed designation G 113; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This terminology standard covers terms that relate to the durability testing of Nonmetallic Materials using natural and artificial weathering exposure techniques.

1.2 It is the intent of this terminology standard to include those weathering terms in wide use in ASTM for which standard definitions appear desirable.

2. Referenced Documents

2.1 ASTM Standards:

D 9 Terminology Relating to Wood²

E 41 Terminology Relating to Conditioning³

E 284 Terminology of Appearance⁴

E 349 Definitions of Terms Relating to Space Simulation⁵

E 456 Terminology Relating to Quality and Statistics⁶

E 772 Terminology Relating to Solar Energy Conversion⁷

E 973M Practice for the Determination of the Spectral Mismatch Parameter between a Photovoltaic Device and a Photovoltaic Reference Cell [Metric]⁷

G 84 Practice for Measurement of Time-of-Wetness on Surfaces Exposed to Wetting Conditions as in Atmospheric Corrosion Testing⁸

G 90 Practice for Performing Accelerated Outdoor Weathering of Nonmetallic Materials Using Concentrated Natural Sunlight³

2.2 AATCC Method:⁹

16 Colorfastness to Light

2.3 ANSI Standards:¹⁰

ANSI/NCSL Z540-2-1997 American National Standard for Expressing Uncertainty—U.S. Guide to the Expression of Uncertainty in Measurement

3. Significance and Use

3.1 This terminology is not intended to supersede the requirements of similar definitions in certain other documents, but is intended to provide a listing of terms that are in current widespread usage, and their context in relation to weathering.

4. Terminology

4.1 Definitions:

accelerated outdoor weathering, *n*—outdoor weathering using the sun as the source of irradiance, and where the rate of deterioration is accelerated over that of the in-service exposure position increasing one or more of the influencing parameters.

actinic radiation, *n*—the spectral region(s) of a light source responsible for the photodegradation of a particular material.

ambient temperature, *n*—the existing temperature of the air or of an object in thermal equilibrium with the surrounding atmosphere.

azimuth angle, *n*—an angle of a plane to the horizon measured clockwise to the object.

backed exposure, *n*—a technique of weathering in which the test specimens being exposed are mounted onto a solid backing material, of sufficient strength to hold the specimen. When the specimen and the backing are in direct contact the backing material must be of a type that will not contaminate the specimen. When two materials are intimately joined together to form one composite, the materials below the top surface are not considered as a backing.

DISCUSSION—The backing is typically plywood which has the effect of increasing specimen temperature and wet time during exposure, compared to exposure unbacked.

black box, *n*—a thin metal box painted flat black on the

¹ This guide is under the jurisdiction of ASTM Committee G03 on Weathering and Durability and is the direct responsibility of Subcommittee G03.92 on Terminology.

Current edition approved Feb. 10, 2003. Published May 2003. Originally approved in 1992. Last previous edition approved in 2002 as G 113 – 02.

² Annual Book of ASTM Standards, Vol 04.10.

³ Annual Book of ASTM Standards, Vol 06.01.

⁴ Annual Book of ASTM Standards, Vol 14.04.

⁵ Annual Book of ASTM Standards, Vol 15.03.

⁶ Annual Book of ASTM Standards, Vol 14.02.

⁷ Annual Book of ASTM Standards, Vol 12.02.

⁸ Annual Book of ASTM Standards, Vol 03.02.

⁹ Available from American Association of Textile Chemists and Colorists, P.O. Box 12215, Research Triangle Park, NC 27709.

¹⁰ Available from National Conference of Standards Laboratories, 1800 30th St., Suite 305B, Boulder, CO 80301.

outside only exclusive of the bottom surface with an open top where the flat test specimens to be exposed constitute the top surface of the box; the box is equipped with mounting strips to hold the test specimens firmly in place; the top surface of the box must be completely filled at all times; any blank spaces on the top surface must be occupied by flat black “dummy” panels to maintain correct operating condition.

black box under glass, *n*—a glass covered enclosure or cabinet of any convenient size. It shall be constructed of corrosion resistant metal and be enclosed to prevent ambient air from circulating over the samples. Exterior non-glass surfaces shall be painted black. The interior shall remain unpainted.

black panel thermometer, *n*—a temperature measuring device consisting of a metal panel, having a black coating which absorbs all wavelengths uniformly, with a thermal sensitive element firmly attached to the center of the exposed surface. The black panel thermometer is used to control an artificial weathering device and to provide an estimate of the maximum temperature of samples exposed to a radiant energy source.

climatological types, *n*—major regions of significantly different recurring weather patterns. In weathering, several distinct climatological types are used to evaluate the atmospheric durability of materials. Within any single climatological variation, at a specific geographic location, short term weather patterns may fluctuate significantly. This may cause variability in short term exposures. Major climatic variations that are used for the study of weathering are:

warm, moist climate—subtropical climate distinguished as warm and humid year round, with frequent rain showers.

hot, dry climate—desert climate distinguished as sunny, hot, and dry year round, with rare scattered showers.

control, *n*—in weathering, the term control has three current widespread uses:

1. A material which is of similar composition and construction to the test material used for comparison, exposed at the same time.

DISCUSSION—A reference material can often be used as the control.

2. A portion of the material to be tested which is stored under conditions in which it is stable, and is used for comparison between exposed and original state.

DISCUSSION—This definition is deprecated in favor of “File Specimen.”

3. A portion of the exposed specimen which is protected from light exposure by masking.

DISCUSSION—This definition is deprecated in favor of “Masked Area.”

daylight, *n*—as used in weathering, the term equivalent to “sunlight”. It refers to the full spectrum of solar irradiance, that is, ultraviolet through infrared, and includes both diffuse sky and direct solar irradiance.

DISCUSSION—This definition differs from CIE (Commission Internationale de l’Eclairage) Publication No 17.4 which defines daylight as “the visible part of global (sun plus sky) radiation.

direct weathering, *n*—a technique of weathering in which

the test specimens are exposed to all prevailing elements of the atmosphere.

dry-bulb temperature, *n*—the temperature of the ambient air; for example, the temperature that is measured by the dry-bulb thermometer of a psychrometer. **D 4023**

durability, *n*—in weathering, a measure of the retention of original condition and function of a material after exposure to a specified set of conditions.

enclosed carbon arc, *n*—a light source in which an arc is produced across a pair of carbon rods by a high energy electrical source, such that a high intensity light is emitted. The carbons are enclosed in an inverted glass dome which acts to prolong the life of the carbons, and to modify the spectral power distribution received by the specimens.

exposure, *n*—the act of subjecting the test specimen to the test conditions.

exposure angle, *n*—the tilt from horizontal of the test specimen or any other exposed material, or both.

fading unit (AATCC), *n*—a specific amount of exposure made under the conditions specified in various test methods where one Fading Unit is one-twentieth ($1/20$ th) of the exposure required to produce a color change equal to Step No. 4 on the Gray Scale for Color Change or 1.7 ± 0.3 CIELAB units of color difference on Blue Wool Lightfastness Standard L 4 or 20 ± 1.7 CIELAB units of color difference on the Xenon Reference Fabric or combination thereof.

AATCC Technical Manual

file specimen, *n*—portion of the material to be tested which is stored under conditions in which it is stable, and is used for comparison between exposed and original state.

fluorescent ultraviolet lamp, *v*—a lamp in which the irradiance from a low pressure mercury arc is transformed to a longer wavelength UV radiation by a phosphor; the spectral power distribution of a fluorescent lamp is determined by the emission spectrum of the mercury arc light source, the emission spectrum of the phosphor and the UV transmittance of the glass tube.

fresnel-reflector system, *n*—flat mirrors arranged in an array such that they reflect onto a target, the illuminated area of which simulates the size and shape of the flat mirror. Such an array simulates the ray-tracing of a parabolic trough of the same aperture angle. **G 90**

gray scale, *n*—the scale consists of nine pairs of standard gray chips each pair representing a difference in color or contrast (shade and strength) corresponding to a numerical fastness rating. The results of colorfastness tests are rated by visually comparing the difference in color represented by the scale.

AATCC Technical Manual

irradiance, *n*—the radiant power per unit area incident on a receiver, typically reported in watts per square metre, $W m^{-2}$

E 973

masked area, *n*—a portion of the exposed specimen which is protected from light exposure by masking. (See also **control**.)

DISCUSSION—The mask area is not protected from heat and moisture.

natural weathering, *n*—outdoor exposure of materials to unconcentrated sunlight, the purpose of which is to assess

the effects of environmental factors on various functional and decorative parameters of interest.

open flame sunshine carbon arc, n —a light source in which an arc is produced across a pair of copper coated carbon rods filled with rare earth elements intended to produce a specific spectral power distribution. The carbons are open to the atmosphere and may be surrounded by a glass lantern arrangement which acts to modify the spectral power distribution received by the specimens.

operational control point, n —a set point for equilibrium conditions measured at sensor location(s) in an exposure device.

operational control point tolerance, n —the permissible deviation from the operational control point including permitted random deviation during equilibrium conditions in an exposure device.

DISCUSSION—It is assumed, as with all measurements, that the measurement of tolerance has uncertainty of measurement.

operational uniformity, n —the range around the operational control point for measured parameters within the intended exposure area within the limits of intended operational range.

DISCUSSION—It is assumed, as with all measurements, that the measurement of uniformity has uncertainty of measurement.

photodegradation, n —photochemically induced changes in the condition of the material.

pyranometer, n —a radiometer used to measure the total solar radiant energy incident upon a surface per unit time per area. This energy includes the direct radiant energy, diffuse radiant energy, and reflected radiant energy from the background.

E 772

pyrheliometer, n —a radiometer used to measure the direct or beam solar irradiance incident on a surface normal to the sun's rays.

E 772

radiant exposure, n —time integral of irradiance, typically reported in joules per square metre, J m^{-2}

E 772

radiometer, n —a general class of instruments designed to detect and measure radiant energy.

reference material, n —a material with known performance.

reference specimen, n —a portion of the reference material that is to be exposed.

relative humidity, n —the ratio of the actual pressure of existing water vapor to the maximum possible (saturation) pressure of water vapor in the atmosphere at the same temperature, expressed as a percentage.

E 41

sample, n —a group of units or portion of material, taken from a larger collection of units or quantity of material, which serves to provide information that can be used as a basis for action on the larger quantity.

DISCUSSION—Where sample is used as a term for the item to be exposed, the term is deprecated in favor of specimen.

solar azimuth angle, n —the angular distance measured clockwise from due north to the projection of the beam radiation on the horizontal plane (see Fig. 1).

solar irradiance, n —as related to natural weathering of materials, the irradiance of the sun incident on the earth's

surface, having wavelengths between about 295 nm and 4050 nm (4.05 microns).

E 772

solar irradiance, global $E_5(2\pi)$, n —solar irradiance received on an upward facing horizontal surface directly transmitted from the solid angle of the sun's disk or scattered in traversing the atmosphere, measured in watts per square metre.

solar irradiance, infrared—as related to natural weathering of materials, terrestrial solar irradiance for which the wavelengths are longer than those for visible irradiance and shorter than about 4.05 microns.

DISCUSSION—The limits of the spectral range of infrared radiation are not well defined and may vary according to the user. Committee E-2.1.2 of the CIE distinguishes in the spectral range between 780 nm and 1 mm into IR-A, IR-B, and IR-C as shown below.

IR-A	780 to 14 μm
IR-B	1.4 to 3 μm
IR-C	3 μm to 1 mm

solar irradiance, ultraviolet, n —as related to natural weathering of materials, terrestrial solar irradiance for which the wavelengths are shorter than those for visible irradiance and longer than about 295 nm.

DISCUSSION—The upper limit is not well defined because it is dependent on eye sensitivity. It has been identified as either 380 nm or 400 nm. CIE Committee E-2.1.2 of the CIE divides the spectral range between 280 and 400 nm into UV-A and UV-B as shown below.

UV-A	315 to 400 nm
UV-B	280 to 315 nm

solar irradiance, visible, n —the portion of solar radiation capable of causing a visual sensation.

DISCUSSION—The limits of the spectral range of visible radiation are not well defined and may vary according to the user. The shorter limit is generally taken between 380 and 400 nm and the longer limit between 760 and 780 nm (1 nanometre, $\text{nm} = 10^{-9}$ m).

solarization, v —change in transmittance, reflectance, or absorptance property of a material, such as glass, as a result of exposure to sunlight or other light sources.

spectral power distribution, n —the absolute or relative radiant power emitted by a source, or incident upon a receiver as a function of wavelength.

standard weathering reference material (SWRM), n —a Weathering Reference Material (WRM) whose well documented weathering degradation properties have been certified by a recognized standards agency or group and which are identical when exposed to identical test conditions.

sunlight, n —as used in weathering, the term equivalent to “daylight”. It refers to the full spectrum of solar irradiance, that is, ultraviolet through infrared, and includes both diffuse sky and direct solar irradiance.

DISCUSSION—This definition differs from CIE (Commission Internationale de l'Éclairage) Publication No. 17.4, which defines sunlight as the “visible part of direct solar irradiance.”

test specimen, n —a specific portion of the samples upon which the testing is to be performed.

tilt angle, v —the angle between the horizontal and the plane of the test fixture, glass frame, or sensory instrumentation.

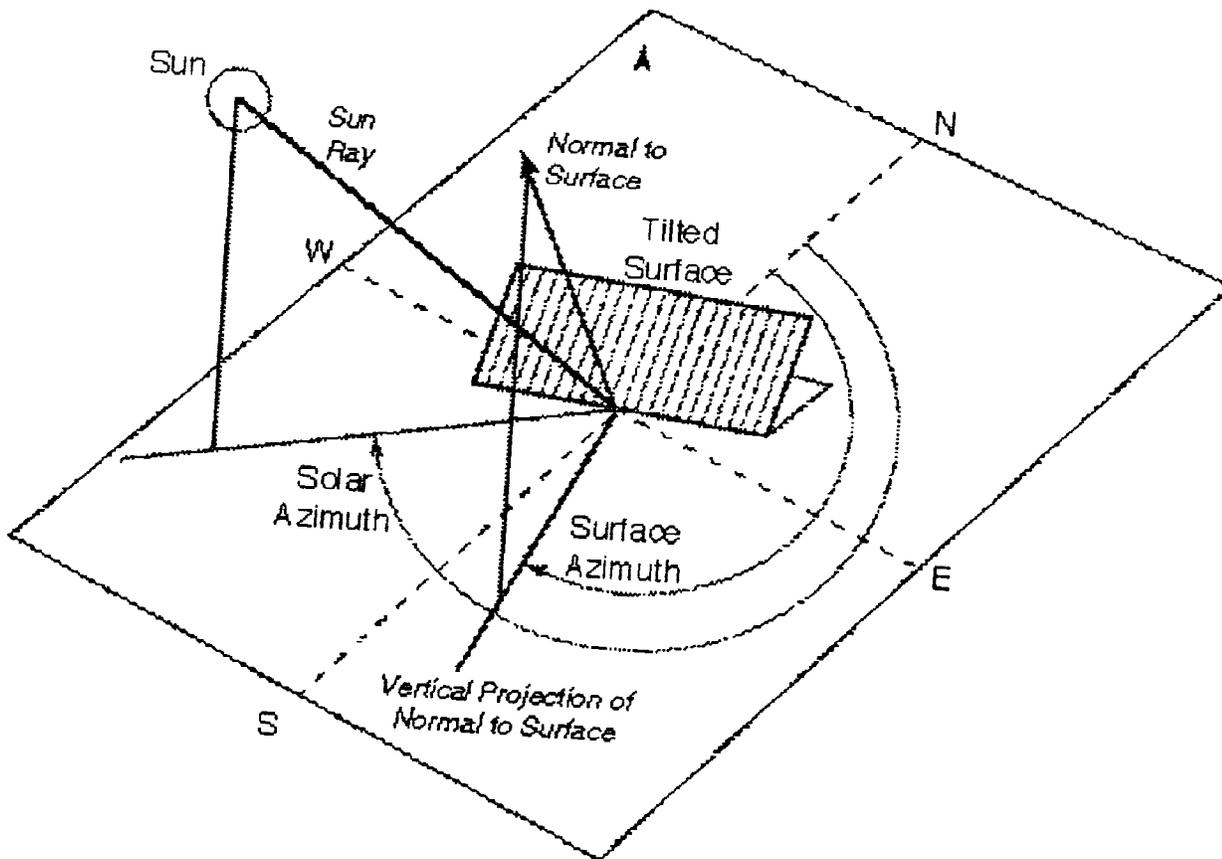


FIG. 1 Solar Azimuth Angle

time-of-wetness, n —the total amount of time that a surface is wet. This is typically reported in hours.

DISCUSSION—At this time, the sensing element described in Practice G 84 is the only recognized device for the measurement of time-of-wetness.

total solar ultraviolet, adj —solar energy above the solar cut on and below the visible, when received after transmittance through the atmosphere.

DISCUSSION—The total UV radiometer commonly used has a sensitive range of 290 to 385 nm.

transmittance, n —the ratio of transmitted flux to incident flux under specified geometric and spectral conditions, expressed either as a percentage or a decimal fraction.

transmittance, spectral, n —the transmittance as a function of wavelength.

unbacked exposure, n —a technique of weathering in which the test specimens are exposed such that the portion of the specimen being evaluated is open to the effects of the weather on all sides.

uncertainty (of measurement), n —parameter, associated with the result of a measurement, that characterizes the dispersion of the values that could be reasonably attributed to the measurand.

DISCUSSION—(1) The parameter may be, for example, a standard

deviation (or a given multiple of it), or the half-width of an interval having a stated confidence level. (2) Uncertainty of measurement comprises, in general, many components. Some of these components may be evaluated from statistical distribution of the results of series of measurements and can be characterized by experimental standard deviations. The other components, which can also be characterized by standard deviations, are evaluated from assumed probability distributions based on experience or other information. (3) It is understood that the result of the measurement is the best estimate of the value of the measurand, and that all components of uncertainty, including those arising from systematic effects, such as components associated with corrections and reference standards, contribute to the dispersion.

GUM 2.2.3

weathering behind glass, v —a technique of weathering in which the test specimens are exposed in a glass covered frame constructed of wood, metal, or other satisfactory material which protects the specimen from the effects of rain and weather. The frame shall be open at the back or sides to allow ambient air to circulate over the specimens.

weathering reference material (WRM), n —a reference material having well documented and repeatable degradation properties when exposed to identical test conditions.

DISCUSSION—A WRM is used to monitor exposures in order to establish consistency among tests run under nominally the same conditions. Some WRMs, for example, blue wool, are also used to

define periods of exposure. A WRM is not used for performance comparison with the test material. A control material is used for the latter purpose.

wet-bulb temperature, *n*—the equilibrium temperature of a liquid vaporising into a gas. With water and air, wet-bulb and dry-bulb temperatures can be used to calculate the relative humidity. **D 9**

xenon arc, *n*—an excited state xenon-plasma that emits UV,

visible, and IR radiation and is produced by passing a high intensity electric current through a quartz tube containing xenon gas.

DISCUSSION—For accelerated weathering, the spectral power distribution of the xenon-arc is typically modified by specific types of filters in order to simulate terrestrial solar radiation or solar radiation transmitted through window or automotive glass.

ASTM International takes no position respecting the validity of any patent rights asserted in connection with any item mentioned in this standard. Users of this standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, are entirely their own responsibility.

This standard is subject to revision at any time by the responsible technical committee and must be reviewed every five years and if not revised, either reapproved or withdrawn. Your comments are invited either for revision of this standard or for additional standards and should be addressed to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend. If you feel that your comments have not received a fair hearing you should make your views known to the ASTM Committee on Standards, at the address shown below.

This standard is copyrighted by ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959, United States. Individual reprints (single or multiple copies) of this standard may be obtained by contacting ASTM at the above address or at 610-832-9585 (phone), 610-832-9555 (fax), or service@astm.org (e-mail); or through the ASTM website (www.astm.org).